


# barbas .

## Installation and maintenance manual

BOX<sup>25</sup> 55

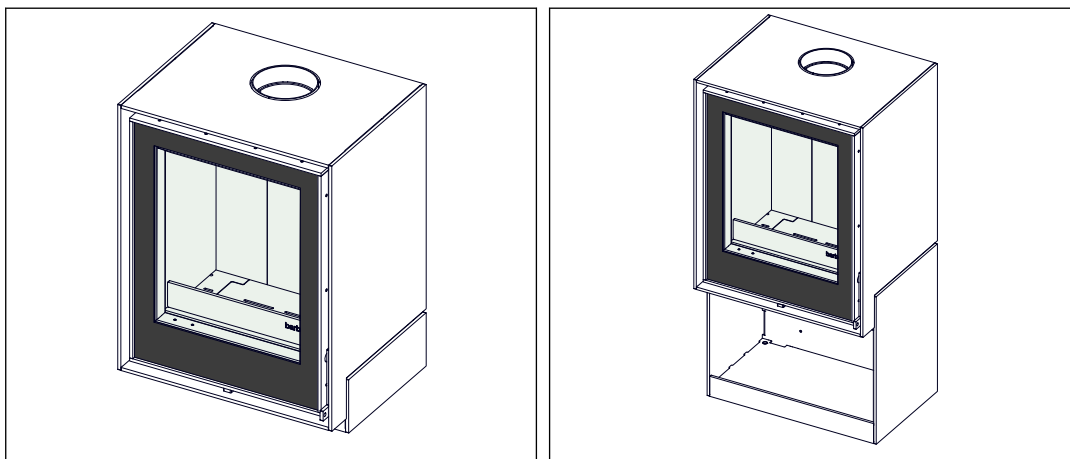

This product is not suitable for primary heating purposes



Serial number:

Production date:

**© Barbas Bellfires BV**

This document or parts thereof may not be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, nor otherwise, without the prior written permission of Barbas Bellfires BV. This document could contain technical inaccuracies or typographical errors. Barbas Bellfires BV reserves the right to revise this document from time to time in the contents thereof.

**Contact information**

Barbas Bellfires BV

Hallenstraat 17, 5531 AB Bladel, The Netherlands

E-mail: [info@barbas.com](mailto:info@barbas.com)

[www.barbasbellfires.com](http://www.barbasbellfires.com)

## Contents

<b>1</b>	<b>Declaration of Performance.....</b>	<b>5</b>
1.1	BOX <sup>25</sup> 55.....	5
1.2	BOX <sup>25</sup> 55 with wood log storage module.....	6
1.3	BOX <sup>25</sup> 55 with support frame.....	7
<b>2</b>	<b>About this document.....</b>	<b>8</b>
2.1	How to work with this document.....	8
2.2	Warnings and cautions used in this document.....	8
2.3	Related documentation.....	8
<b>3</b>	<b>Description.....</b>	<b>9</b>
3.1	Overview of the front of the appliance.....	9
3.2	Overview of the bottom of the appliance.....	10
3.3	Overview of the rear of the appliance .....	11
3.4	Overview of the bottom of the appliance with wood log storage module.....	13
3.5	Overview of the rear of the appliance with wood log storage module.....	14
3.6	Appliance options.....	14
3.7	Intended use.....	14
<b>4</b>	<b>Safety.....</b>	<b>16</b>
4.1	Safety instructions for installation.....	16
4.2	Safety instructions with regard to the environment.....	16
<b>5</b>	<b>Clearances.....</b>	<b>17</b>
5.1	Safety distances BOX <sup>25</sup> 55.....	17
5.2	Safety distances BOX <sup>25</sup> 55 with wood log storage module.....	19
5.3	Safety distances 55 with support frame .....	19
<b>6</b>	<b>Installation requirements.....</b>	<b>22</b>
6.1	Requirements on the installation of the appliance.....	22
6.2	Installation on a natural stone platform.....	22
6.3	Requirements on the chimney.....	22
<b>7</b>	<b>Installation of the BOX<sup>25</sup> 55 with steel base.....</b>	<b>24</b>
7.1	Install the appliance.....	24
7.2	Connect the optional external air supply.....	24
7.2.1	Rear connection.....	24
7.2.2	Bottom connection.....	25
7.3	Connect the flue gas pipe.....	26
7.4	Final check on the appliance.....	26
<b>8</b>	<b>Installation of the BOX<sup>25</sup> 55 with stone base.....</b>	<b>27</b>

<b>9</b>	<b>Installation of the BOX<sup>25</sup> 55 with wood log storage module.....</b>	<b>28</b>
9.1	Install the appliance .....	28
9.2	Connect the optional external air supply.....	29
9.2.1	Rear connection.....	29
9.2.2	Bottom connection.....	30
9.3	Connect the flue gas pipe.....	30
9.4	Final check on the appliance.....	30
<b>10</b>	<b>Installation of the BOX<sup>25</sup> 55 with support frame.....</b>	<b>31</b>
10.1	Install the appliance 55 with support frame.....	31
10.2	Connect the optional external air supply.....	32
10.3	Connect the flue gas pipe.....	33
10.4	Final check on the appliance.....	34
<b>11</b>	<b>Maintenance.....</b>	<b>35</b>
11.1	Appliance.....	35
11.2	Combustion air supply.....	35
11.3	Chimney.....	35
11.4	Removal of the bottom plates, grate and ash tray.....	35
11.5	Removal of the baffles.....	36
11.5.1	Remove the heat shield.....	37
11.5.2	Remove the lower baffle.....	37
11.5.3	Remove the upper baffle.....	37
11.6	Install the bottom plates, ash tray and grate .....	38
11.7	Installation of the baffles.....	39
11.7.1	Install the upper baffle.....	39
11.7.2	Install the lower baffle.....	40
11.7.3	Install the heat shield.....	41
<b>12</b>	<b>Technical data.....</b>	<b>42</b>
12.1	Technical data.....	42
12.2	Product information according regulation (EU) 2015/1185.....	44
<b>13</b>	<b>Dimensions .....</b>	<b>45</b>
13.1	Dimensions BOX <sup>25</sup> 55 .....	45
13.2	Dimensions BOX <sup>25</sup> 55 with wood log storage module.....	46
13.3	Dimensions BOX <sup>25</sup> 55 with support frame.....	46
13.4	Dimensions decorative stone bar.....	48
<b>14</b>	<b>Warranty Terms.....</b>	<b>49</b>

# 1 Declaration of Performance

## 1.1 BOX<sup>25</sup> 55

**barbas bellfires.**  
Crafted to wonder

EC-declaration of conformity	
This EC declaration of conformity applies to the product described below and describes the conformity with the following directives: <b>2009/125/EC Directive for the setting of eco-design requirements for energy-related products (eco-design directive)</b> Relevant Regulation: (EU) 2015/1185	
Declaration of Performance	
According to regulation (EU) 305/2011 <b>No. 1.240.082-1 - CPR-2013/07/01</b>	
1. Unique identification code of the product-type	BOX25 55
2. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer	Room heater without hot water supply
3. Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11(5)	Barbas Bellfires BV; Hallenstraat 17; 5531 AB Bladel; The Netherlands
4. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2)	Not applicable
5. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V	System 3
6. In case of the declaration of performance concerning a construction product covered by a harmonised standard	The notified laboratory SGS Belgium NV, No. 1639 performed the determination of the product type on the basis of type testing under system 3 and issued test report EZKA/2023-09/00005-7
7. Declared performance	
Harmonized technical specification	EN13240:2001/A2:2004/AC:2007
Essential characteristics	Performance
Fire safety	Pass
Distance to combustible materials	Minimum distances, in mm Rear = 250 Sides = 200 Ceiling = - Front = 1600 Floor = 10
Risk of burning fuel falling out	Pass
Emission of combustion products	CO = 0.09 vol%
Surface temperature	Pass
Electrical safety	Pass
Cleanability	Pass
Release of dangerous substances	NPD
Maximum operating pressure	Not applicable
Flue gas temperature at nominal heat output	T = 295 °C
Mechanical resistance (to carry a chimney/flue)	NPD
Thermal output	Pass
Nominal heat output	8.8 kW
Room heating output	8.8 kW
Water heating output	- kW
Energy efficiency	76 %
8. The performance of the product identified in point 1 is in conformity with the declared performance in point 7. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 3.	

Signed for and on behalf of the manufacturer by:

Danny Baijens, CEO  
(Name and function)

Bladel; October 2, 2023  
(place and date of issue)



(Signature)

1.2 BOX<sup>25</sup> 55 with wood log storage module


**barbas bellfires.**  
Crafted to wonder

EC-declaration of conformity	
This EC declaration of conformity applies to the product described below and describes the conformity with the following directives: <b>2009/125/EC Directive for the setting of eco-design requirements for energy-related products (eco-design directive)</b> Relevant Regulation: (EU) 2015/1185	
Declaration of Performance	
According to regulation (EU) 305/2011 <b>No. 1.240.083-1 - CPR-2013/07/01</b>	
1. Unique identification code of the product-type	BOX25 55 with wood log storage module
2. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer	Room heater without hot water supply
3. Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11(5)	Barbas Bellfires BV; Hallenstraat 17; 5531 AB Bladel; The Netherlands
4. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2)	Not applicable
5. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V	System 3
6. In case of the declaration of performance concerning a construction product covered by a harmonised standard	The notified laboratory SGS Belgium NV, No. 1639 performed the determination of the product type on the basis of type testing under system 3 and issued test report EZKA/2023-09/00005-7
7. Declared performance	
Harmonized technical specification	EN13240:2001/A2:2004/AC:2007
Essential characteristics	Performance
Fire safety	Pass
Distance to combustible materials	Minimum distances, in mm Rear = 250 Sides = 200 Ceiling = - Front = 1600 Floor = -
Risk of burning fuel falling out	Pass
Emission of combustion products	CO = 0.09 vol%
Surface temperature	Pass
Electrical safety	Pass
Cleanability	Pass
Release of dangerous substances	NPD
Maximum operating pressure	Not applicable
Flue gas temperature at nominal heat output	T = 295 °C
Mechanical resistance (to carry a chimney/flue)	NPD
Thermal output	Pass
Nominal heat output	8.8 kW
Room heating output	8.8 kW
Water heating output	- kW
Energy efficiency	76 %
8. The performance of the product identified in point 1 is in conformity with the declared performance in point 7. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 3.	

Signed for and on behalf of the manufacturer by:

Danny Baijens, CEO  
(Name and function)

Bladel; February 2, 2024  
(place and date of issue)

  
.....  
(Signature)

### 1.3 BOX<sup>25</sup> 55 with support frame


**barbas bellfires.**  
Crafted to wonder

<b>EC-declaration of conformity</b>	
<p>This EC declaration of conformity applies to the product described below and describes the conformity with the following directives:  <b>2009/125/EC Directive for the setting of eco-design requirements for energy-related products (eco-design directive)</b>  Relevant Regulation: (EU) 2015/1185</p>	
<b>Declaration of Performance</b>	
According to regulation (EU) 305/2011 <b>No. 1.240.084-1 - CPR-2013/07/01</b>	
1. Unique identification code of the product-type	BOX25 55 with support frame
2. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer	Room heater without hot water supply
3. Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11(5)	Barbas Bellfires BV; Hallenstraat 17; 5531 AB Bladel; The Netherlands
4. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2)	Not applicable
5. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V	System 3
6. In case of the declaration of performance concerning a construction product covered by a harmonised standard	The notified laboratory SGS Belgium NV, No. 1639 performed the determination of the product type on the basis of type testing under system 3 and issued test report EZKA/2023-09/00005-7
7. Declared performance	
<b>Harmonized technical specification</b>	<b>EN13240:2001/A2:2004/AC:2007</b>
<b>Essential characteristics</b>	<b>Performance</b>
<b>Fire safety</b>	<b>Pass</b>
Distance to combustible materials	Minimum distances, in mm Rear = - Sides = 200 Ceiling = - Front = 1600 Floor = 10
<b>Risk of burning fuel falling out</b>	Pass
<b>Emission of combustion products</b>	CO = 0.09 vol%
<b>Surface temperature</b>	Pass
<b>Electrical safety</b>	Pass
<b>Cleanability</b>	Pass
<b>Release of dangerous substances</b>	NPD
<b>Maximum operating pressure</b>	Not applicable
<b>Flue gas temperature at nominal heat output</b>	T = 295 °C
<b>Mechanical resistance (to carry a chimney/flue)</b>	NPD
<b>Thermal output</b>	Pass
Nominal heat output	8.8 kW
Room heating output	8.8 kW
Water heating output	- kW
<b>Energy efficiency</b>	76 %
8. The performance of the product identified in point 1 is in conformity with the declared performance in point 7. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 3.	

Signed for and on behalf of the manufacturer by:

Danny Baijens, CEO  
(Name and function)

Bladel; February 2, 2024  
(place and date of issue)

  
.....  
(Signature)

## 2 About this document

This document shows the necessary information to do these tasks on the BOX<sup>25</sup> 55:

- Installation
- Maintenance

This document refers to the BOX<sup>25</sup> 55 as 'the appliance'. This document is an essential part of your appliance. Read it carefully before you do work on the appliance. Keep it in a safe place.

The original instructions of the document are in English. All other language versions of the document are translations of the original instructions. It is not always possible to provide a detailed illustration of every single item of the equipment. The illustrations in this document show a typical setup. The illustrations are for instructional use only.

### 2.1 How to work with this document

1. Make yourself familiar with the structure and content of the document.
2. Read the safety section in detail.
3. Make sure that you understand all the instructions.
4. Do the procedures completely and in the given sequence.

### 2.2 Warnings and cautions used in this document

#### Warning



If you do not obey these instructions, there is a risk that can cause personal injury or death.

#### Caution

If you do not obey these instructions, there is a risk of damage to the equipment or to property.

#### Note

A note shows more information.

Symbol	Description
	Visual sign that there is a hazard
	Visual sign that there is a notice

### 2.3 Related documentation

- Installation and maintenance manual
- User manual



### 3 Description



**Note:**

The appliance is a room-sealed appliance only if combustion air comes from the outer side of the building through a pipe that is connected to the combustion air inlet of the appliance. In all other cases the appliance is not a room-sealed appliance and the data for leak tightness as given in section 12 are not valid.


**Note:**

The appliance without the wood log storage module has a steel base. If you ordered the appliance without steel base, you can ask a stonemason to make you a stone base. Refer to section 13.4 for the dimensions of the stone base.


#### 3.1 Overview of the front of the appliance

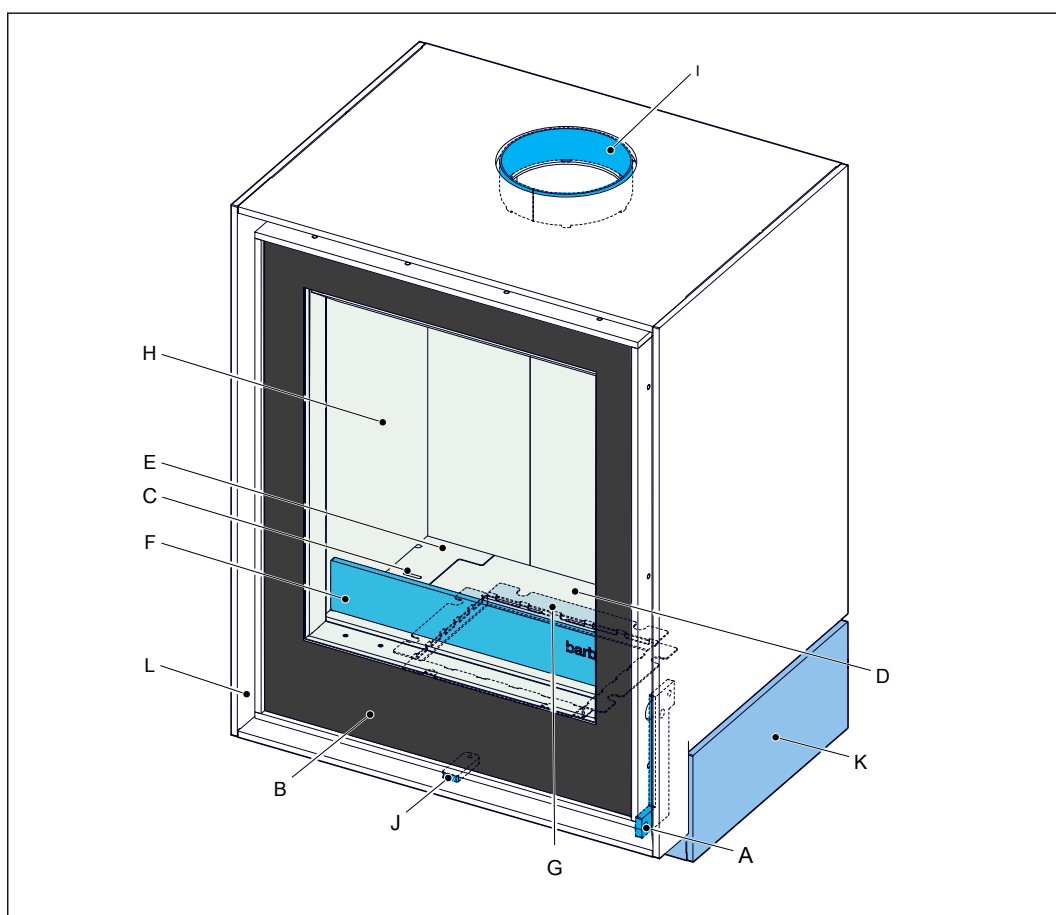

- |   |                     |   |  |
|---|---------------------|---|--|
| A | Door handle         | G | Ash tray (under the grate)             |
| B | Glass               | H | Combustion chamber panels <sup>1</sup> |
| C | Primary air inlet   | I | Flue connector                         |
| D | Grate               | J | Control lever                          |
| E | Steel bottom plates | K | Steel base                             |
| F | Log guard           |   |  |


<sup>1</sup> Cast iron, vermiculite or heat resistant ceramic, dependent on choice at purchase

### 3.2 Overview of the bottom of the appliance

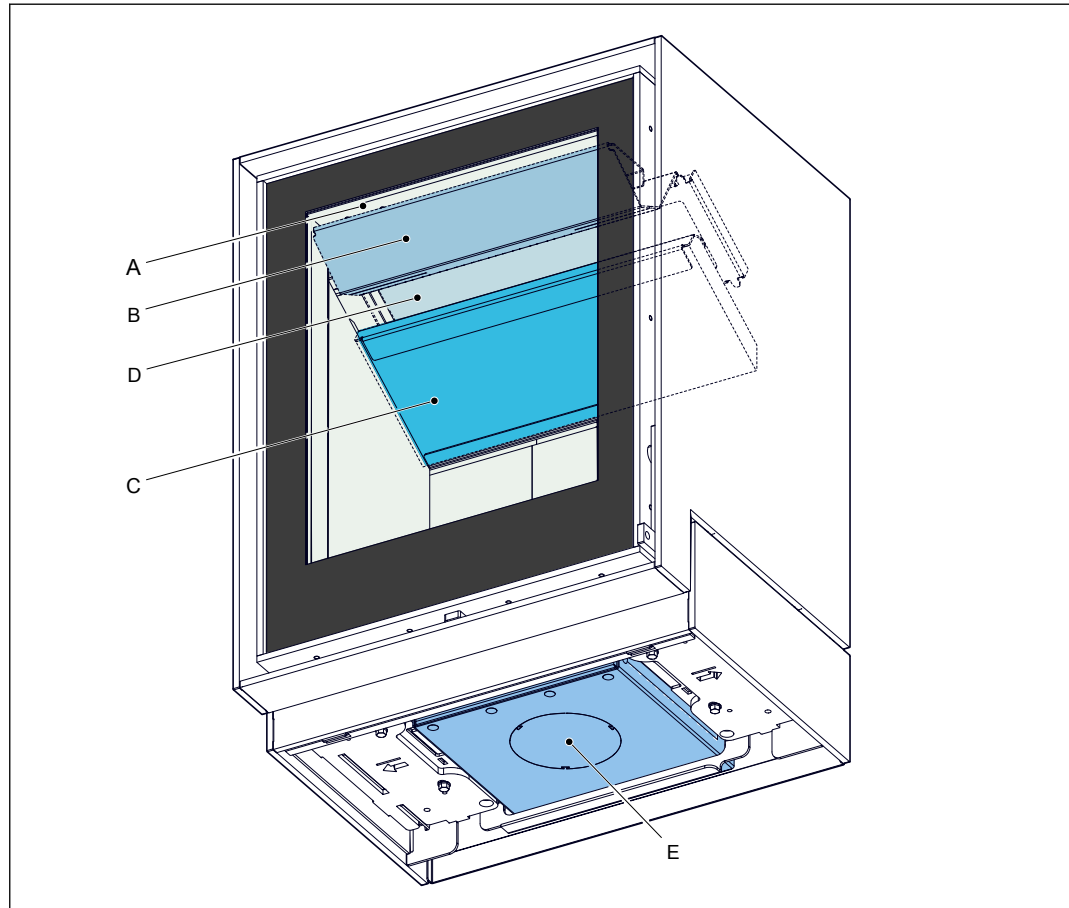


- |   |  |   |   |
|---|--|---|---|
| A | Airwash inlet                                  | D | Upper baffle                                  |
| B | Heat shield                                    | E | Connection for external combustion air supply |
| C | Lower baffle with secondary air inlet openings |   |   |

## 3.3 Overview of the rear of the appliance

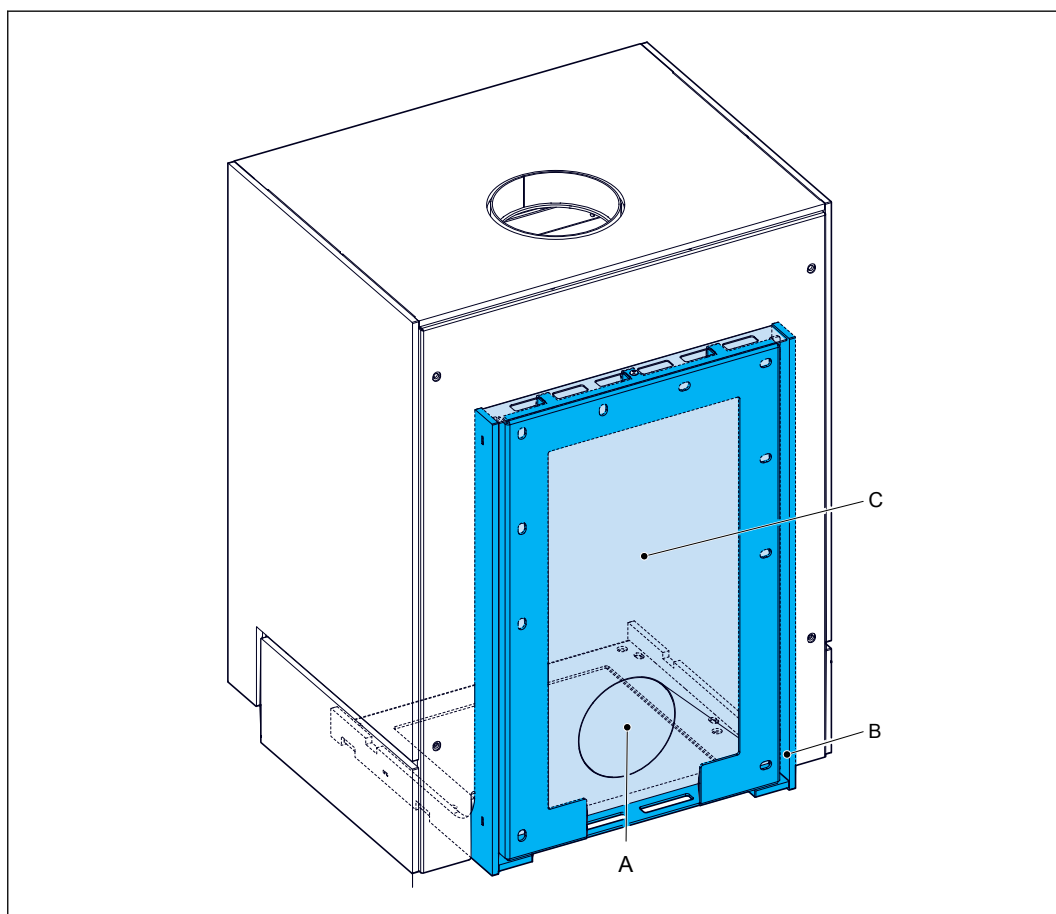


- A Connection for external combustion  
air supply
- B Support frame (optional)
- C Heat shield

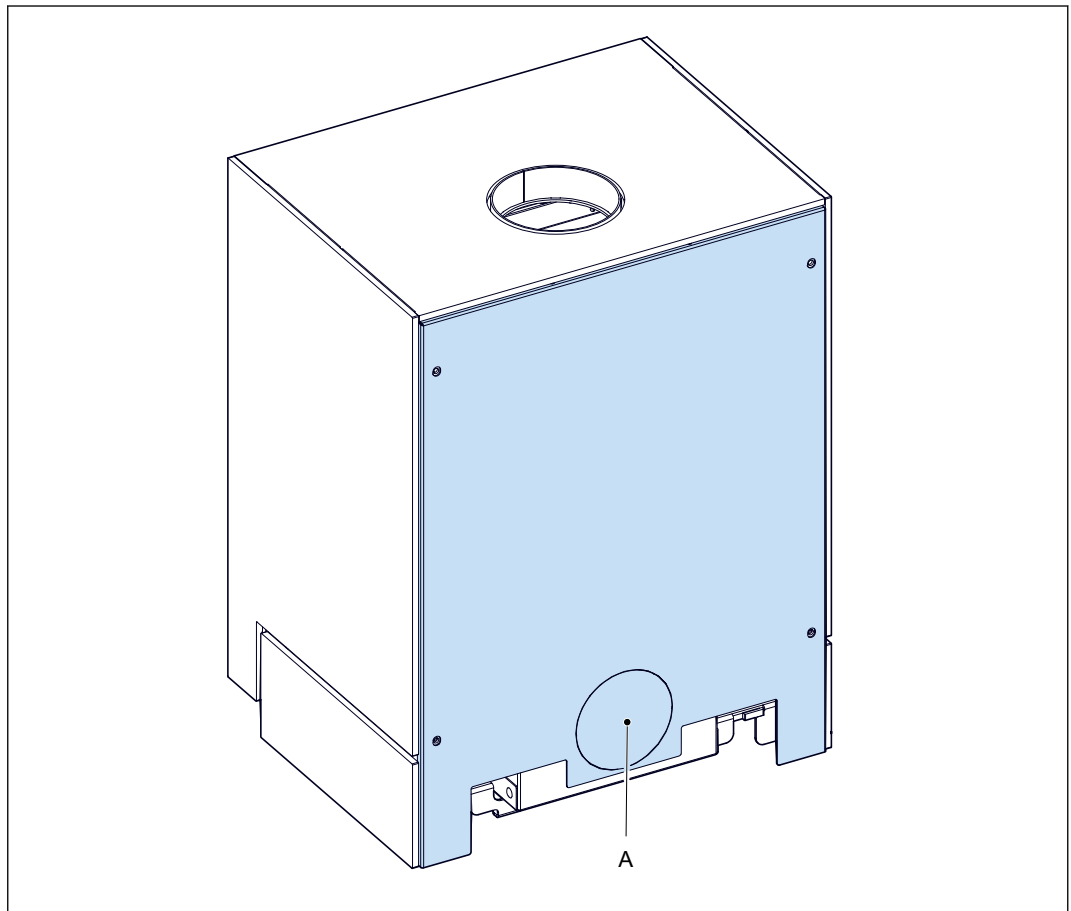


A Connection for external combustion  
air supply

## 3.4 Overview of the bottom of the appliance with wood log storage module

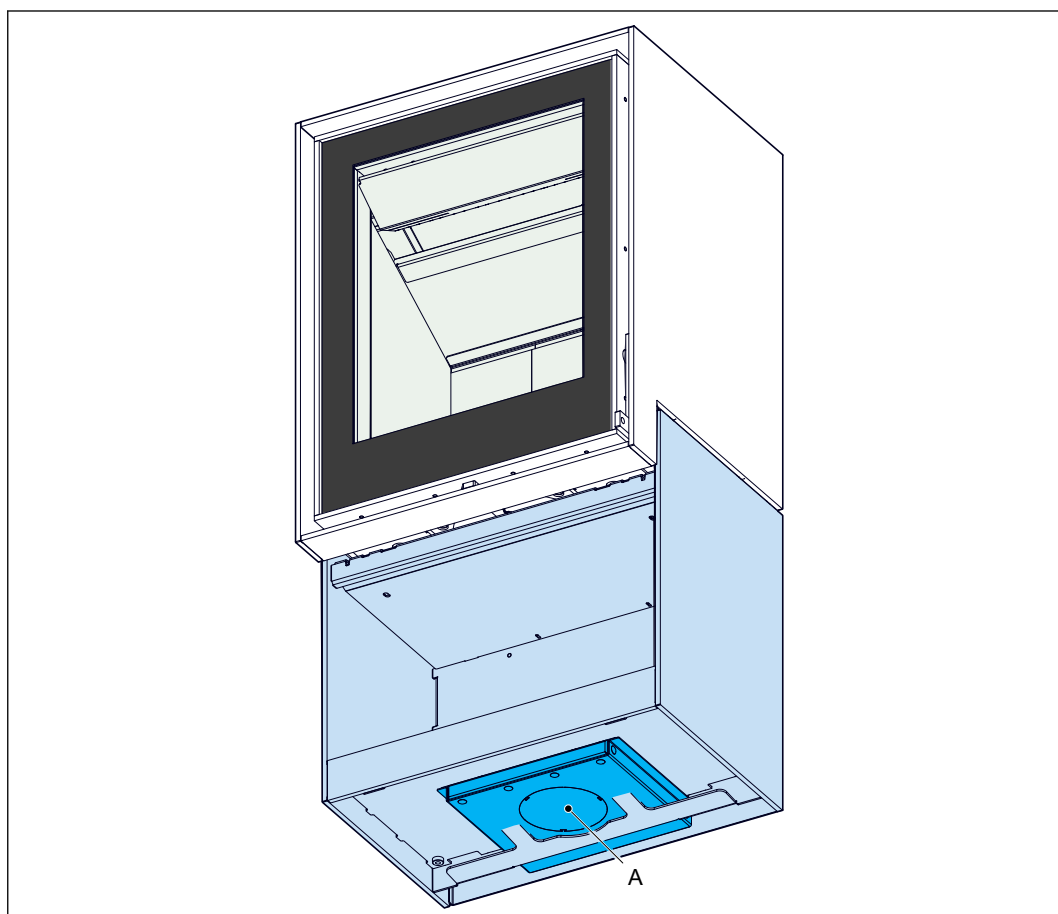

A Connection for external combustion air supply

### 3.5 Overview of the rear of the appliance with wood log storage module

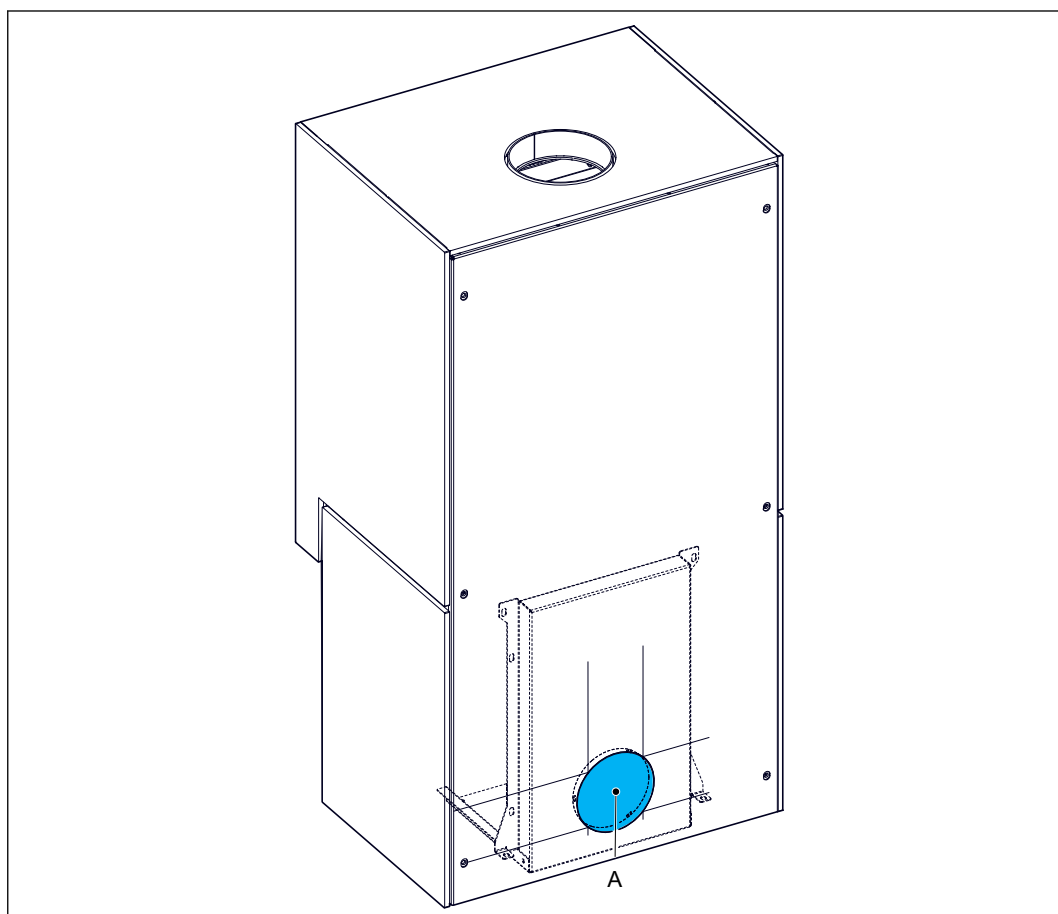

A Connection for external combustion air supply

### 3.6 Appliance options

Option	Description
Stone base	A stone base under the appliance as alternative for the steel base. Barbas does not supply the stone base, but the installer can order a stone base according the specifications in section <a href="#">13.4</a> at a local supplier.

### 3.7 Intended use

The appliance is intended for indoor use to heat the room wherein it is installed. Do not use it for other purposes.

It is not allowed to use the appliance as primary heating appliance.

The appliance is intended for use with wood logs or wood briquettes as fuel. Do not use other fuels.

The appliance is intended for use with the door closed.

The appliance may only be used at the location that meets the requirements for the installation of the appliance.

The appliance is intended for intermittent use and is not intended for continuous use.

The appliance is intended to heat the room by direct heating. It is not allowed to connect the appliance to a central-heating installation.

## 4 Safety

### 4.1 Safety instructions for installation

**Warning:**

- Installation must be done by a qualified installer.
- Install the appliance in accordance with the following installation instructions and the national and local applicable regulations.
- Make sure that the area around the fireplace is free of flammable material at all times. The minimal safe distance is 180 cm.
- If applicable, contact the authorities if it is allowed to connect the appliance to a flue that is also connected to another appliance.
- Do not install the appliance directly against a flammable wall or non-flammable wall. Refer to section 5 for minimum clearances between the appliance and the wall.
- Applicable for the appliance without wood log storage module: Do not install the appliance without the steel base or stone base.
- Install a carbon monoxide alarm. The carbon monoxide alarm should be battery-powered and designed to operate for the life of the carbon monoxide alarm, following which it should be replaced. Alternatively a mains powered carbon monoxide alarm can be used, however this must be fitted with a sensor failure warning device.

**Caution:**

- Install the appliance on a floor with adequate load-bearing capacity. Refer to section 12 for the weight of the appliance.
- Make sure that the chimney has no creaks and is in general good order.
- Install a suitable cap on the chimney outlet to avoid birds' nests build in the chimney.
- Parts in the appliance can be moved during transportation. Make sure these parts are in the correct position. See the User Manual.
- Do not use masking tape on the appliance. Masking tape can damage the finish of the appliance.
- Make sure that the chimney temperature class is minimum T400 sootfire resistant.
- Do not install the appliance in a room with a ventilation system that makes pressures below -15 Pa.

### 4.2 Safety instructions with regard to the environment

- Dispose of the packing materials in an environmentally friendly way.
- Dispose of batteries as chemical waste.
- Dispose of ceramic heat-resistant glass as household waste. Do not dispose of ceramic heat-resistant glass in a glass recycling container.
- Dispose of an obsolete appliance according to instructions of the authorities or the fitter.
- Obey the local regulations.



## 5 Clearances



### Warning:


- Obey the instructions in this section. Failure to follow these instruction can create a fire hazard.
- Do not put the appliance directly against a flammable or non-flammable wall.



**Caution:** Make sure that flammable materials near the appliance can never reach a temperature above 85 degrees centigrade

- BOX<sup>25</sup> 55, refer to section [5.1](#).
- BOX<sup>25</sup> 55 with wood log storage module, refer to section [5.2](#).
- BOX<sup>25</sup> 55 with support frame, refer to section [5.3](#).

### 5.1 Safety distances BOX<sup>25</sup> 55

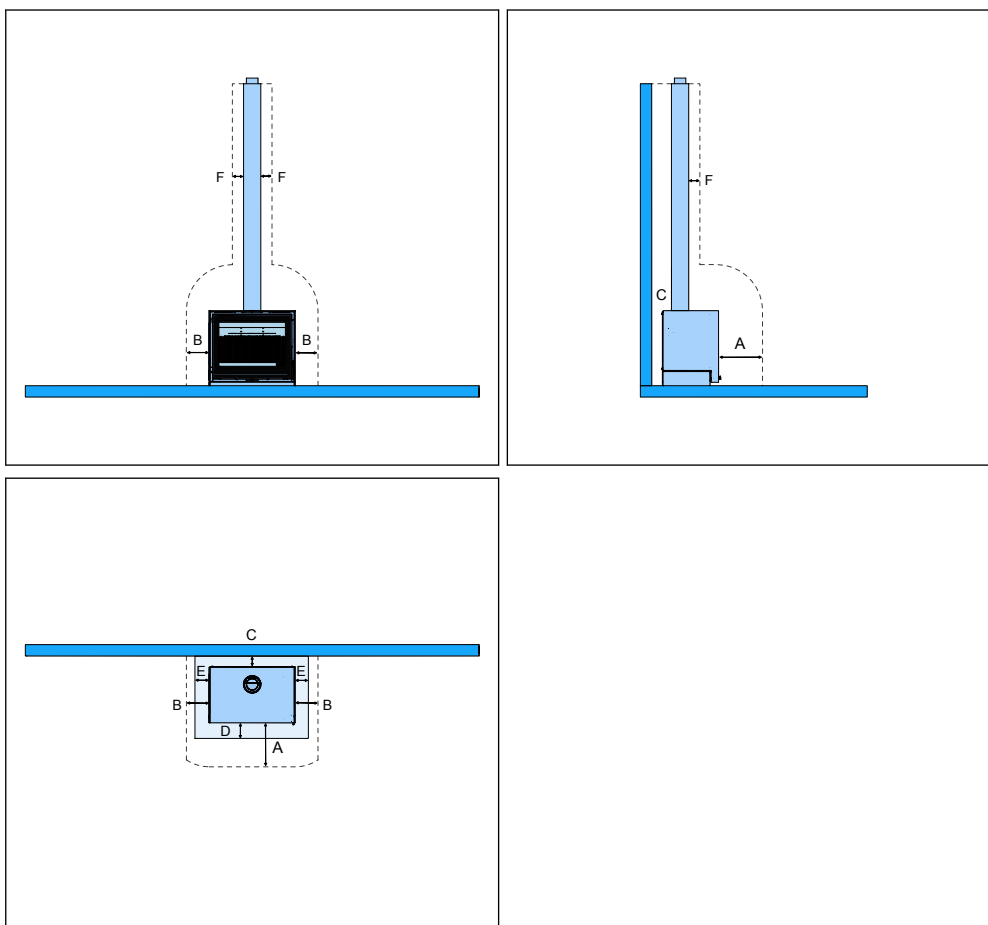


BOX <sup>25</sup> 55			
Label	Minimum distance to flammable materials in cm	Remark	Minimum distance to non-flammable materials in cm
A	160		80
B	20		5
C	25		5
D	See remark.	Install a non-flammable floor plate with a thickness of minimum 5 cm (floor stone) when the appliance is put on a flammable floor. The width (E) of the floor plate must be minimum 15 cm from each side of the appliance. The depth of the floor plate in front of the appliance (D) is minimum 50 cm, when the floor plate is level with the floor. If the appliance is put on a flammable platform, make sure the depth of the non-flammable floor plate is the same size as the platform in front of the appliance.	not applicable
E	15		5
F	20		5

**Note:**

Heat radiation from the appliance can cause cracks in a floor plate of natural stone if put directly in front of the appliance. Make sure the floor plate is resistant to temperatures of more than 100 °C. Refer to the supplier of the natural stone for advice

## 5.2 Safety distances BOX<sup>25</sup> 55 with wood log storage module

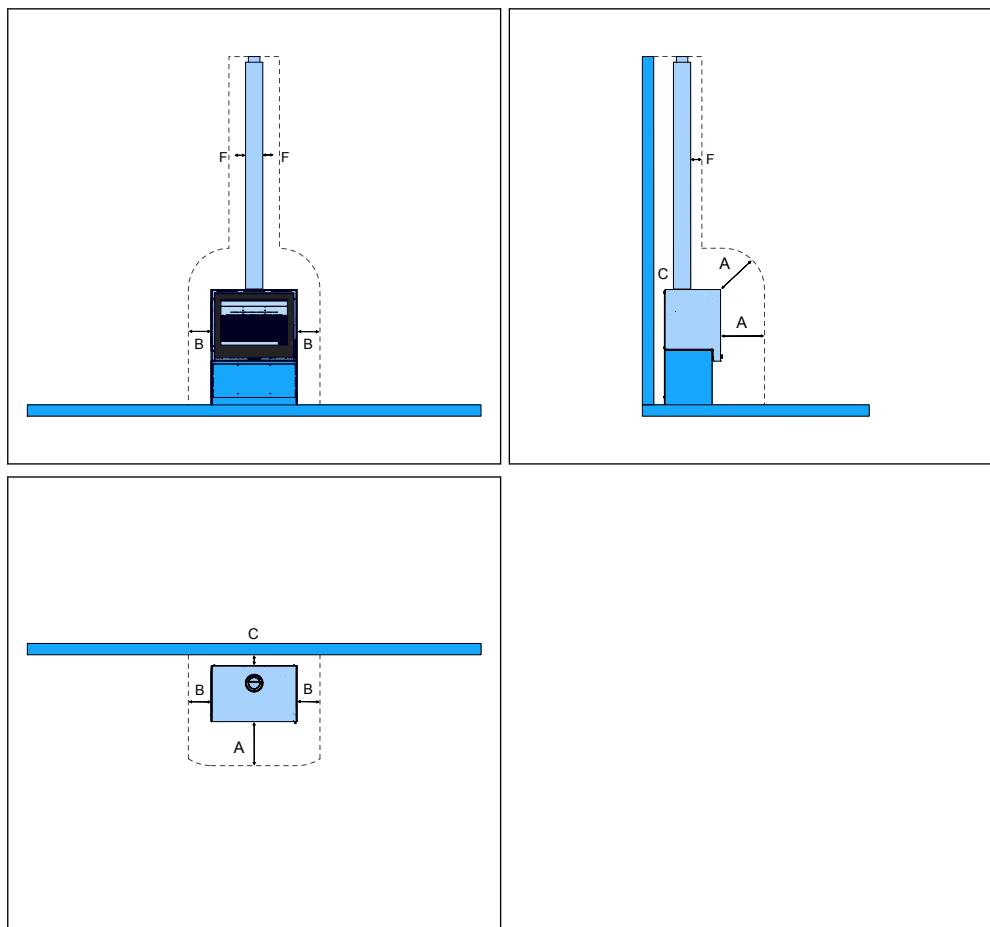


BOX <sup>25</sup> 55 with wood log storage module			
Label	Minimum distance to flammable materials in cm	Remark	Minimum distance to nonflammable materials in cm
A	160		80
B	20		5
C	25		5
D	20	Install a non-flammable floor plate (floor stone) in front of the appliance when put on a flammable floor. The floor plate must have a minimum depth (D) of 20 cm in front of the appliance and a minimum width (E) of 15 cm from each side of the appliance.	not applicable
E	15		5
F	20		5

## 5.3 Safety distances 55 with support frame




### Note:

Use the support frame to attach the appliance on a wall.

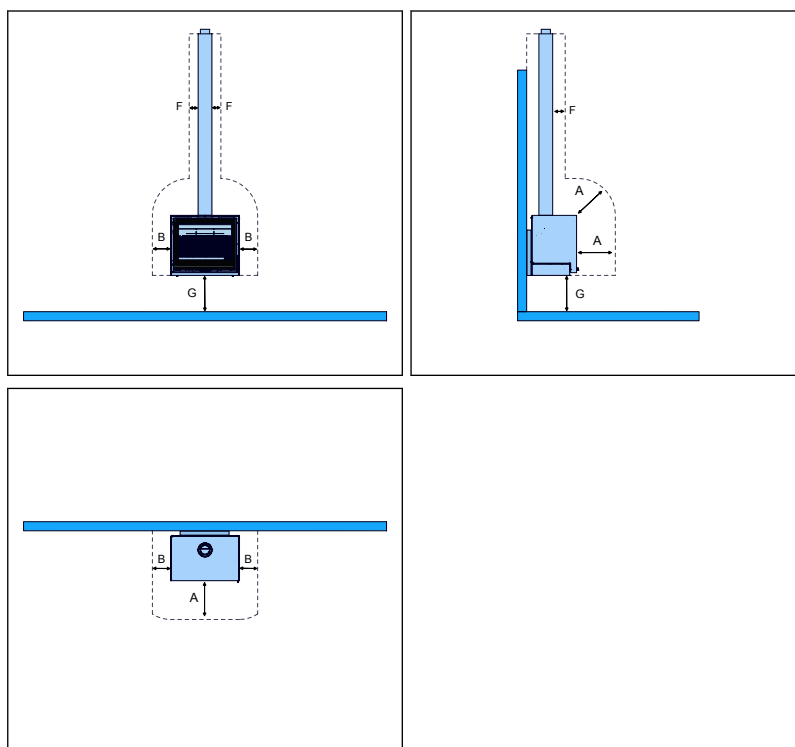

55 with support frame			
Label	Minimum distance to flammable materials in cm	Remark	Minimum distance to nonflammable materials in cm
A	160		80
B	20		5
C	Not applicable	Do not install on a flammable wall.	Not applicable
D	20 - 50	Install a non-flammable floor plate (floor stone) when the appliance is put above a flammable floor. The width (E) of the plate must be minimum 15 cm from each side of the appliance. The depth of the plate in front of the appliance (D) is dependent on the distance between the underside of the box and the floor. Refer to the graph hereunder.	Not applicable
E	15		Not applicable
F	20	Make sure the wall behind the appliance and chimney is non-flammable.	5
G	10		5

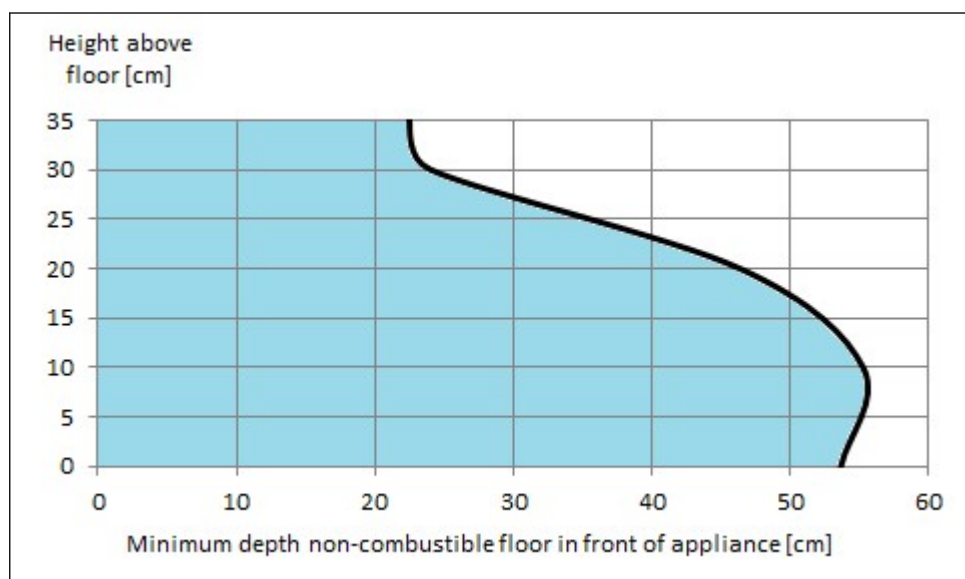

**Example for the graph:** If the bottom of the 55 with support frame is 25 cm above the floor (vertical axis on the graph), the depth of the non-flammable floor in front of the appliance (horizontal axis on the graph) is minimum 35 cm.

## 6 Installation requirements


### 6.1 Requirements on the installation of the appliance

- Make sure that the location agrees with the safety requirements. Refer to section 4.1.
- Make sure the floor is made of concrete or a solid pedestal of non-combustible material.
- For the BOX<sup>25</sup> 55 without wood log storage module, make sure the floor is level. After placement it is not possible to level the appliance.
- Make sure the floor can support the weight of the appliance. Refer to section 12 for the weight of the appliance.
- Make sure that the floor temperatures below and in front of the appliance cannot be higher than 85 °C, during use of the appliance. Refer to section 5.
- The non-combustible floor must have a width that extends at least 150 mm from each side of the appliance and a minimum depth in front of the appliance according the requirements in section 5.
- Make sure the room where the appliance is installed has correct ventilation.
- Make sure that combustion air can flow into the appliance without obstruction.
- If applicable, install a valve in the external combustion air pipe.

### 6.2 Installation on a natural stone platform

Obey the requirements if the appliance is put on a natural stone platform.

- The platform must have minimum thickness of 3 cm.
- The platform must support the weight of the appliance directly underneath it.
- Ask your natural stone dealer for additional advice regarding the specific type of stone in combination with the appliance.

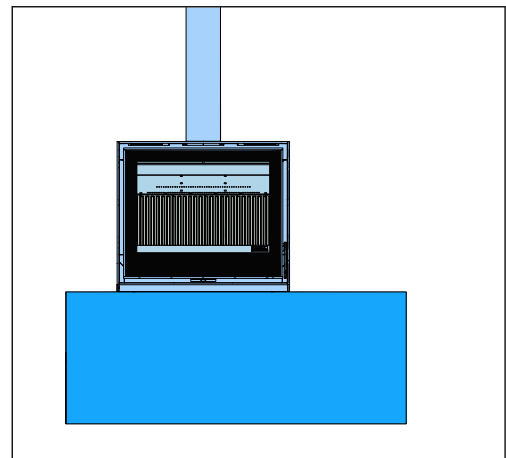

### 6.3 Requirements on the chimney

- Make sure that in case of use of an existing (masonry) chimney, it is in good order and applicable for the appliance. Ask your dealer or chimney sweeper for advice.
- Make sure the flue system obeys the national and local applicable regulations.
- Make sure the weight of the chimney is not supported by the appliance.
- Only connect the appliance to a chimney that is also connected with other appliances if it is permitted by local regulations and if the chimney allows to connect multiple appliances to it. Ask your installer for advice.
- The flue system must have a temperature class designation of minimum T400.
- The inner diameter of the chimney must be minimum 150 mm over the total length.
- Use a steel chimney pipe with a wall thickness of minimum 2 mm between the appliance and the existing chimney.
- Do not use more than 2 bends of 45°.

- Do not use horizontal flue pipes.
- The chimney outlet must be minimum 6 meter above the top of the appliance.
- The chimney outlet must be minimum 40 cm above the top of a sloped roof.
- The chimney outlet must be minimum 1 meter above a flat roof.
- The chimney outlet must be free from any objects (buildings, trees, etc.) within a horizontal range of minimum 5 meter.
- Make sure to remove the chimney valve when present in the existing chimney.
- Make sure your fire insurance policy covers any damage caused by a chimney fire.

## 7 Installation of the BOX<sup>25</sup> 55 with steel base

### 7.1 Install the appliance

1. Put the appliance in the designated position. To put the appliance on a natural stone platform, refer to section [6.2](#)
2. Obey the safety distances. Refer to section [5](#).
3. If necessary, put a nonflammable hearth under the appliance. Refer to section [5.1](#).
4. Make sure that the flue connection on the appliance is correct in line with the flue pipe to the ceiling.
5. Make sure the appliance is installed horizontally. Use a spirit lever.

### 7.2 Connect the optional external air supply


- The appliance has the possibility to connect a supply pipe for external combustion air. During operation the appliance gets combustion air from this air duct.
- It is strongly recommended to install a valve in the external combustion air supply pipe, to avoid debris in the pipe and to avoid water vapor condensation in the appliance when not in use.

Connection on the rear of the appliance, refer to section [7.2.1](#).

Connection on the bottom of the appliance, refer to section [7.2](#).


#### 7.2.1 Rear connection

1. Remove the round break out plate at the rear of the appliance with a hammer. Another round break out plate is now visible.

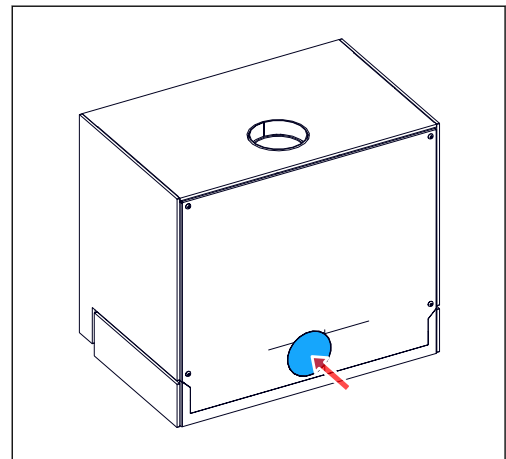



2. Remove the round break out plate with a hammer.

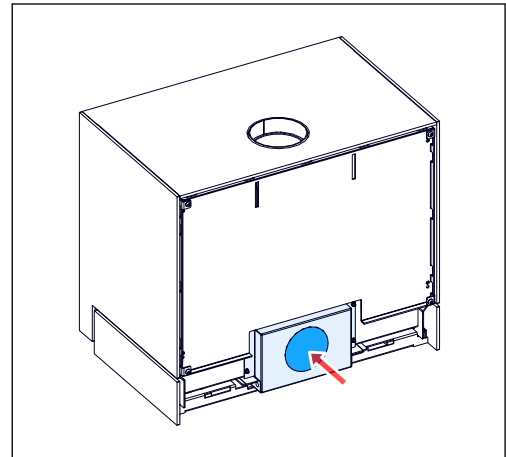


3. Put the collar adaptor in the open external air inlet opening.
4. Bend out the 3 lips on the collar adaptor to attach the collar adaptor on the inlet opening.
5. Identify the location in the outer wall for the external combustion air supply inlet.
6. Make a hole in the outer wall with at a minimum diameter of 125 mm.
7. Put a flexible aluminum pipe or rigid steel pipe in the hole.
8. Install a grate in the hole in the outer wall and attach the pipe to it.
9. Attach the other end of the pipe on the collar adaptor. Use a hose clamp or screws.

## 7.2.2

### Bottom connection

1. Remove the round break out plate at the bottom of the appliance with a hammer.

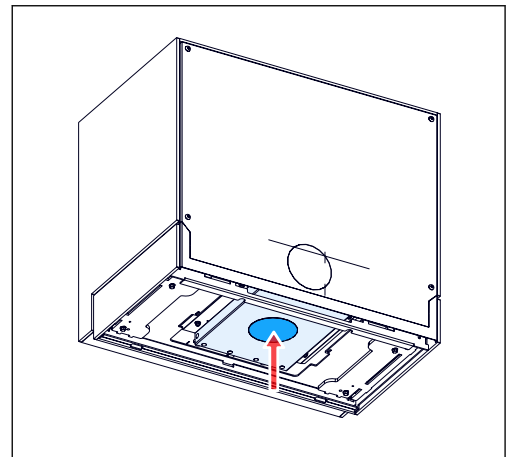

2. If necessary, put the collar adaptor in the open external air inlet opening.
3. Bend out the 3 lips on the collar adaptor to attach the collar adaptor on the inlet opening.
4. Identify the location in the floor for the external combustion air supply inlet.
5. Make a hole in the floor with at a minimum diameter of 125 mm.
6. Put a flexible aluminum pipe in the hole.
7. Attach the other end of the flexible aluminum pipe on the collar adaptor. Use a hose clamp or screws.

## 7.3 Connect the flue gas pipe



**Caution:** During operation of the appliance the outer side of the flue system becomes hot. Refer to section [5.1](#) for minimum distances to flammable material.



**Note:** If the appliance is installed on an unlined, masonry flue with a large diameter, consider using a flue lining system to improve the performance of the appliance.

1. Connect the flue to the flue gas connection on the appliance. If necessary use a steel flue adaptor.
2. If the flue is connected to an existing (masonry) chimney, make sure that the gap between the flue and the existing chimney is sealed with ceramic wool or any other applicable component (ask your flue system supplier for advice)
3. Make sure that all mechanical connections of the flue system are correctly used.
4. Make sure that all of the flue system is gas-tight,

## 7.4 Final check on the appliance

1. Make sure the door closes and opens easy.
2. Make sure the control lever moves easy to left and right without undue noise.
3. Make sure the plates on the side and rear wall of the combustion chamber and the baffles are in the correct position.

Contact your dealer if the final check shows a defect.

## 8 Installation of the BOX<sup>25</sup> 55 with stone base


---

1. Put the stone base on the intended location of the appliance.
2. Obey the safety distances. Refer to section [5](#).
3. Put the appliance on the stone base.
4. Make sure the 4 adjustable feet fit into the 4 notches on the stone base.
5. Follow the instructions in sections [7.2](#), [7.3](#) and [7.4](#).

## 9 Installation of the BOX<sup>25</sup> 55 with wood log storage module

### 9.1 Install the appliance

1. Put the appliance in the designated position.
2. Obey the safety distances. Refer to section [5.2](#).
3. If necessary, put a nonflammable plate under the appliance. Refer to section [5.2](#).
4. Make sure that the flue connection on the appliance is correct in line with the flue pipe to the ceiling.
5. Make sure the appliance is installed horizontally. If necessary, adjust the adjustable feet with a 13 mm fork spanner. Use a spirit level.

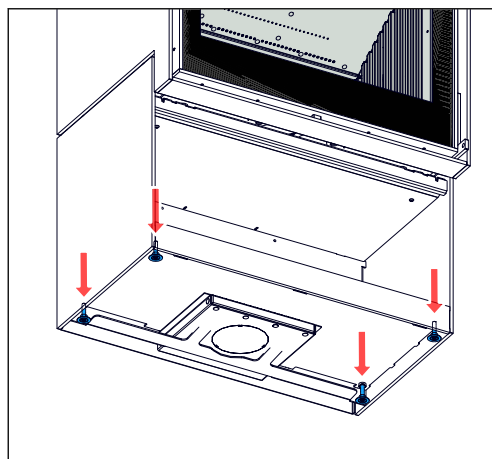

6. Go to section [7.3](#) for instruction for the connection of the flue pipe.

## 9.2 Connect the optional external air supply


- The appliance has the possibility to connect a supply pipe for external combustion air. During operation the appliance gets combustion air from this air duct.
- It is strongly recommended to install a valve in the external combustion air supply pipe, to avoid debris in the pipe and to avoid water vapor condensation in the appliance when not in use.

Connection on the rear of the appliance, refer to section [9.2.1](#).


Connection on the bottom of the appliance, refer to section [9.2.2](#).

### 9.2.1 Rear connection

1. Remove the round break out plate at the rear of the appliance with a hammer. Another round break out plate is now visible.

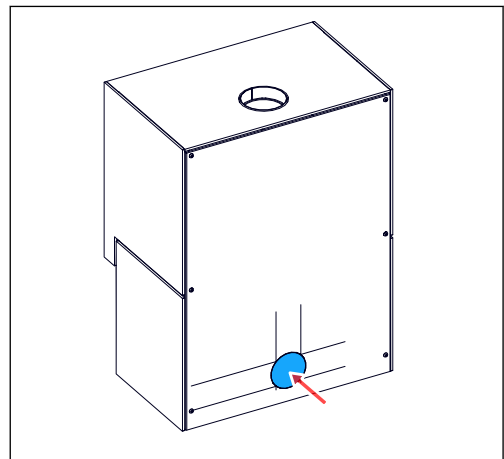


2. Remove the round break out plate with a hammer.

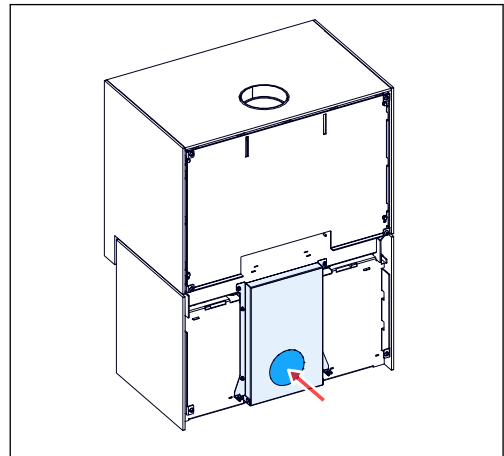

3. Put the collar adaptor in the open external air inlet opening.
4. Bend out the 3 lips on the collar adaptor to attach the collar adaptor on the inlet opening.
5. Identify the location in the outer wall for the external combustion air supply inlet.
6. Make a hole in the outer wall with at a minimum diameter of 125 mm.
7. Put a flexible aluminum pipe or rigid steel pipe in the hole.
8. Install a grate in the hole in the outer wall and attach the pipe to it.
9. Attach the other end of the pipe on the collar adapter. Use a hose clamp or screws.

### 9.2.2 Bottom connection

1. Remove the round break out plate at the bottom of the appliance with a hammer.

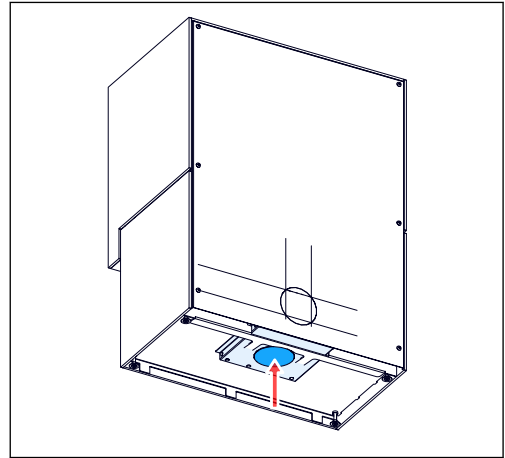

2. If necessary, put the collar adaptor in the open external air inlet opening.
3. Bend out the 3 lips on the collar adaptor to attach the collar adaptor on the inlet opening.
4. Identify the location in the floor for the external combustion air supply inlet.
5. Make a hole in the floor with at a minimum diameter of 125 mm.
6. Put a flexible aluminum pipe in the hole.
7. Attach the other end of the flexible aluminum pipe on the collar adapter. Use a hose clamp or screws.

### 9.3 Connect the flue gas pipe



**Caution:** During operation of the appliance the outer side of the flue system becomes hot. Refer to section 5.2 for minimum distances to flammable material.



**Note:** If the appliance is installed on an unlined, masonry flue with a large diameter, consider using a flue lining system to improve the performance of the appliance.

1. Connect the flue to the flue gas connection on the appliance. If necessary use a steel flue adaptor.
2. If the flue is connected to an existing (masonry) chimney, make sure that the gap between the flue and the existing chimney is sealed with ceramic wool or any other applicable component (ask your flue system supplier for advice)
3. Make sure that all mechanical connections of the flue system are correctly used.
4. Make sure that all of the flue system is gas-tight,

### 9.4 Final check on the appliance




1. Make sure the door closes and opens easy.
2. Make sure the control lever moves easy to left and right without undue noise.
3. Make sure the plates on the side and rear wall of the combustion chamber and the baffles are in the correct position.

Contact your dealer if the final check shows a defect.


## 10 Installation of the BOX<sup>25</sup> 55 with support frame

### 10.1 Install the appliance 55 with support frame


1. Use the steel template to mark the locations on the wall for the 4 corner screws by which the support frame is attached to the wall and to mark the location for the external air supply. Make sure the template is horizontal when marking the locations. Use a spirit level.
2. Drill the 4 holes.
3. Remove the heat shield from the support frame. Use an 11 mm fork spanner.
4. Attach the support frame to the wall with appropriate screws. Use plugs when necessary.

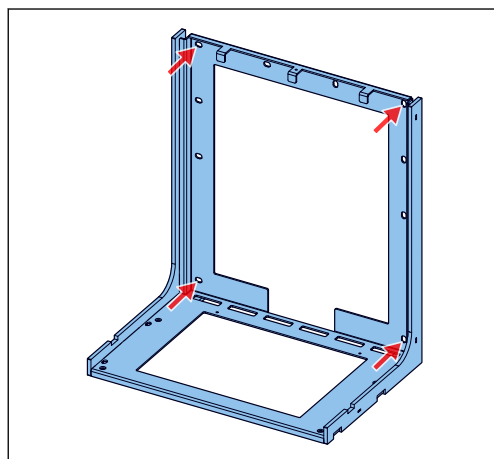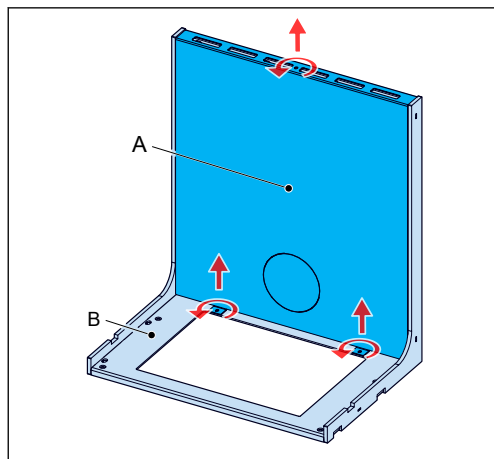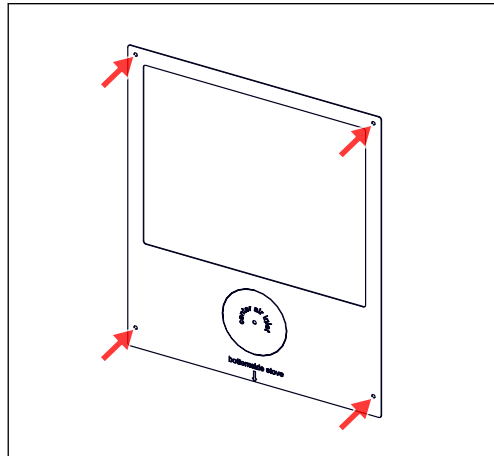


5. Attach the heat shield (A) to the support frame (B). Use an 11 mm fork spanner.

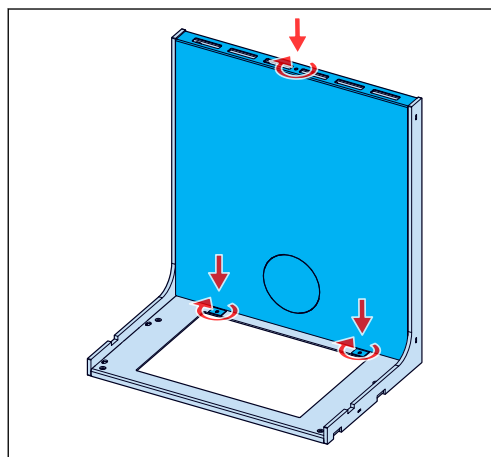

6. Remove the baffles, bottom plates, grate and the door of the appliance to decrease the weight of the appliance.
7. Put the appliance on the support frame. Lower the appliance until it sits tightly on the support frame.

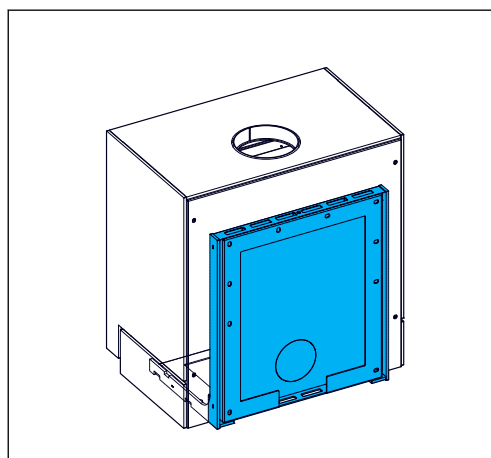

8. Attach the appliance on the support frame with the 4 bolts.
9. Install the baffles, bottom plates, grate and the door in the appliance.

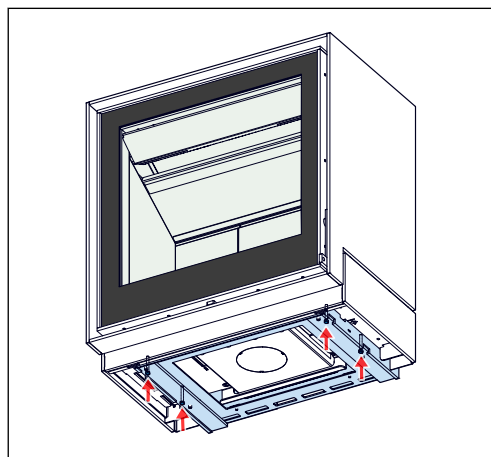


## 10.2

### Connect the optional external air supply


- The appliance has the possibility to connect a supply pipe for external combustion air. During operation the appliance gets combustion air from this air duct.
- It is strongly recommended to install a valve in the external combustion air supply pipe, to avoid debris in the pipe and to avoid water vapor condensation in the appliance when not in use.



1. Remove the round break out plate at the rear of the appliance with a hammer. Another round break out plate is now visible.

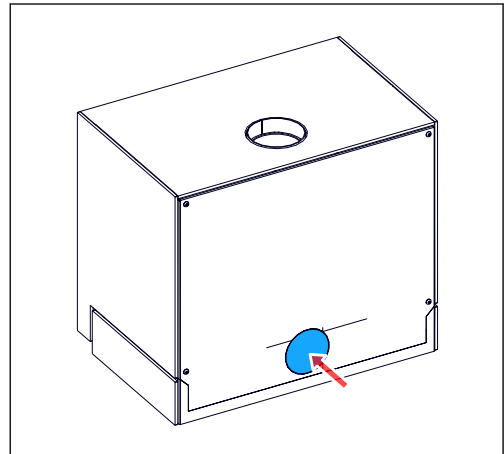

2. Remove the round break out plate with a hammer.

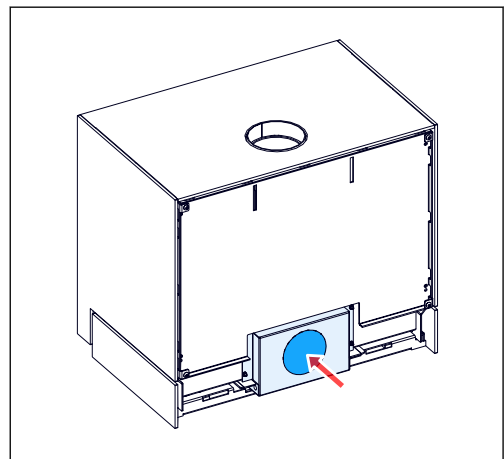

3. Put the collar adaptor in the open external air inlet opening.
4. Bend out the 3 lips on the collar adaptor to attach the collar adaptor on the inlet opening.
5. Identify the location in the outer wall for the external combustion air supply inlet.
6. Make a hole in the outer wall with at a minimum diameter of 125 mm.
7. Put a flexible aluminum pipe or rigid steel pipe in the hole.
8. Install a grate in the hole in the outer wall and attach the pipe to it.
9. Attach the other end of the pipe on the collar adapter. Use a hose clamp or screws.

## 10.3

### Connect the flue gas pipe



**Caution:** During operation of the appliance the outer side of the flue system becomes hot. Refer to section 5.3 for minimum distances to flammable material.



**Note:** If the appliance is installed on an unlined, masonry flue with a large diameter, consider using a flue lining system to improve the performance of the appliance.

1. Connect the flue to the flue gas connection on the appliance. If necessary use a steel flue adaptor.
2. If the flue is connected to an existing (masonry) chimney, make sure that the gap between the flue and the existing chimney is sealed with ceramic wool or any other applicable component (ask your flue system supplier for advice)

3. Make sure that all mechanical connections of the flue system are correctly used.
4. Make sure that all of the flue system is gas-tight,

## **10.4 Final check on the appliance**

1. Make sure the door closes and opens easy.
2. Make sure the control lever moves easy to left and right without undue noise.
3. Make sure the plates on the side and rear wall of the combustion chamber and the baffles are in the correct position.

Contact your dealer if the final check shows a defect.

## 11 Maintenance

**Warning:**

Make sure that the appliance has cooled down completely before doing the procedures in this section.

Do all procedures in this section when necessary.

### 11.1 Appliance

1. Remove ashes from the floor of the combustion chamber.
2. Examine the door seals. Replace damaged seals.
3. Remove the grate and empty the ash tray.
4. Examine the baffle for damage. Replace when damaged.
5. Clean both sides of the glass with glass spray or ceramic hob cleaner.
6. Clean the inside of the appliance with a soft brush.
7. Clean the metal parts on the outside of the appliance with a dry lint free cloth. Use Barbas heat resistant paint spray to repair lacquer damage.

### 11.2 Combustion air supply

1. Make sure that the inlet of the pipe of the external combustion air supply is not blocked by leaves or other debris.
2. Clean the inlet of the pipe of the external combustion air supply.

### 11.3 Chimney

**Note:**

It is recommended to contact a registered chimney sweep company to inspect and clean the chimney.


1. Remove the heat shield, lower baffle and upper baffle before the chimney sweep work. Refer to section [11.5](#) for the procedure to remove the heat shield and the baffles.
2. Sweep and inspect the chimney
3. Make sure there is no blockage in the chimney, for example by birds' nests.
4. Examine for cracks, loose parts and flue gas leakage. It is recommended to use an inspection camera.
5. Install the heat shield, lower baffle and upper baffle. Refer to section [11.7](#) for the procedure to install the heat shield and the baffles.

### 11.4 Removal of the bottom plates, grate and ash tray


**Note:**

Make sure to remove all ashes and unburnt wood from the combustion chamber before the start of this procedure.


1. Lift the front log guard (1) and move the left side up.
2. Remove the front log guard (2)

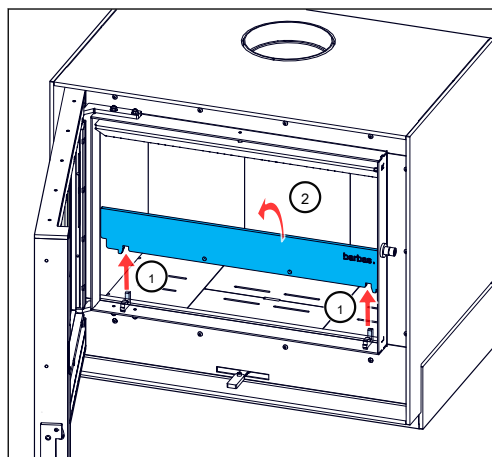

3. Lift the 2 grate plates and remove from the combustion chamber.

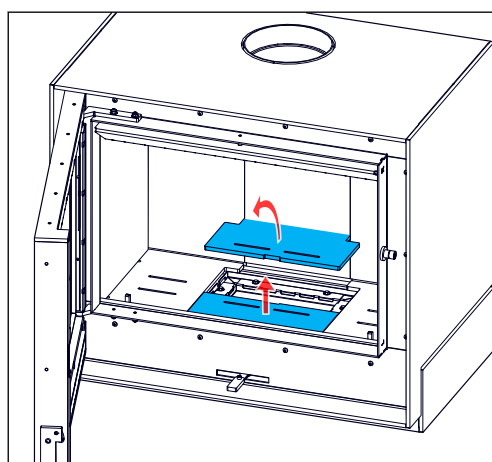

4. Move the 2 steel bottom plates to the center of the fireplace bottom.
5. Lift the steel bottom plates up and remove.

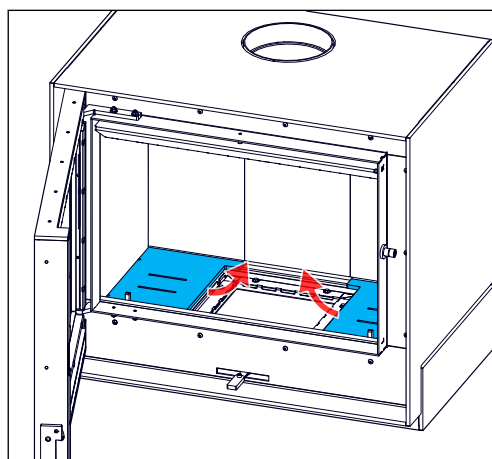

## 11.5

### Removal of the baffles





**Note:**

Make sure to remove all ashes and unburnt wood from the combustion chamber before the start of this procedure.

1. Remove the heat shield. Refer to section [11.5.1](#).
2. Remove the lower baffle. Refer to section [11.5.2](#).
3. Remove the upper baffle. Refer to section [11.5.3](#).

## 11.5.1 Remove the heat shield


1. Open the door.
2. Loosen the nut above the heat shield with a 3 mm hexagonal key and a 10 mm fork spanner. Turn the nut down with the fork spanner and turn the screw up with the hexagonal key until the screw is loose from the heat shield.
3. Push up the front of the heat shield (1) and pull it forward (2) and move downward to a vertical position (3).

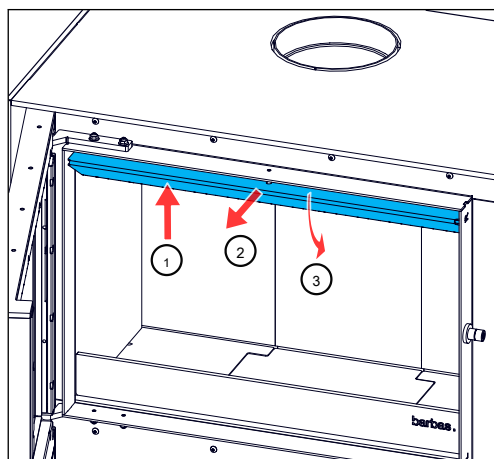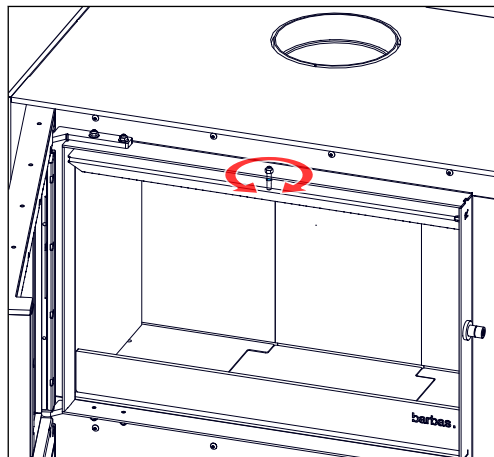

## 11.5.2 Remove the lower baffle

Only do this procedure after finish of the procedure in section [11.5.1](#).


1. Push up the right side of the lower baffle a small distance (1).
2. Lower the left side of the lower baffle a small distance (2) and remove the baffle from the appliance (3).

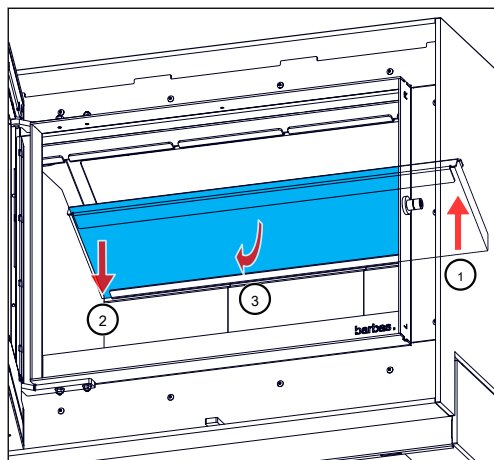

## 11.5.3 Remove the upper baffle

Only do this procedure after finish of the procedure in section [11.5.2](#).



1. Move the upper baffle approximately 1 cm forward (1)
2. Push up the right side of the upper baffle a small distance (2).
3. Lower the left side of the upper baffle a small distance (3) and remove the baffle from the appliance (4).

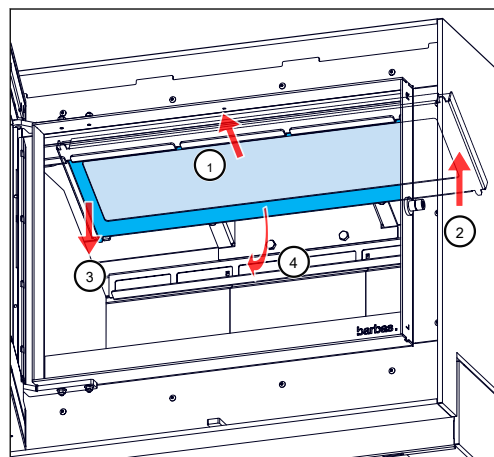


## 11.6

### Install the bottom plates, ash tray and grate

1. Put the left steel bottom plate on the bottom of the combustion chamber.
2. Move the steel bottom plate to the left as much as possible.
3. Put the right steel bottom plate on the bottom of the combustion chamber.
4. Move the steel bottom plate to the right as much as possible.
5. Put a grate on the ashtray with the short side in the direction of the rear wall and move to the rear as far as possible
6. Put the other grate plate with the short side in the direction of the front of the combustion chamber. Move the grate as far as possible to the front of the bottom of the combustion chamber.

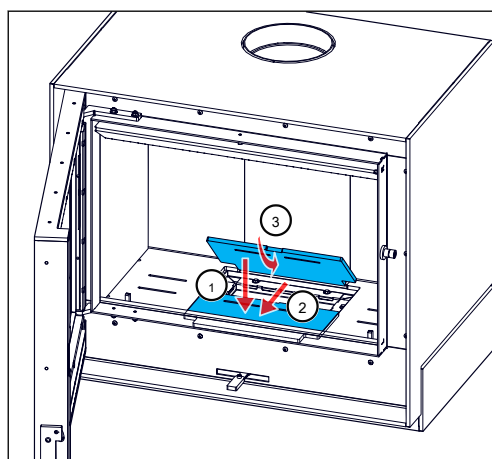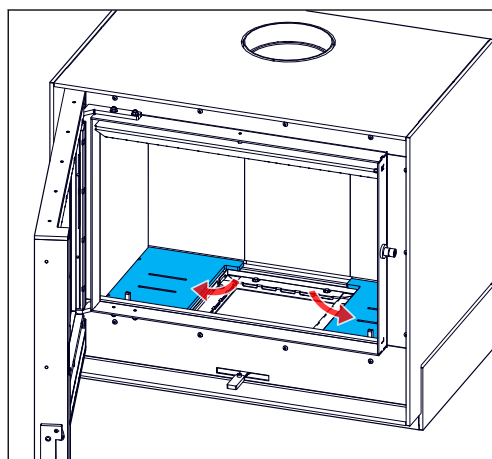

7. Put the front log guard on the notches.

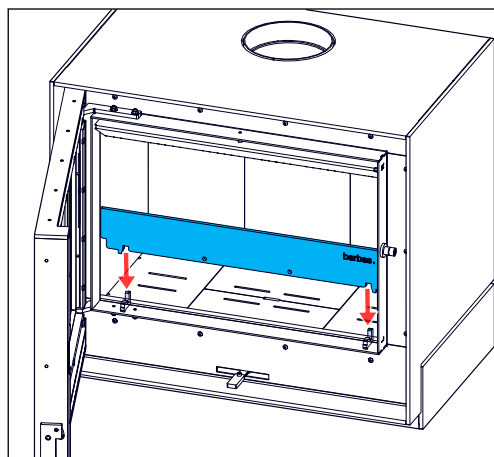


## 11.7 Installation of the baffles


1. Install the upper baffle. Refer to section [11.7.1](#).
2. Install the lower baffle. Refer to section [11.7.2](#).
3. Install the heat shield. Refer to section [11.7.3](#).

### 11.7.1 Install the upper baffle


1. Move the upper baffle under an angle into the combustion chamber.
2. Move the right side of the baffle as high as possible to the far right side of the combustion chamber.

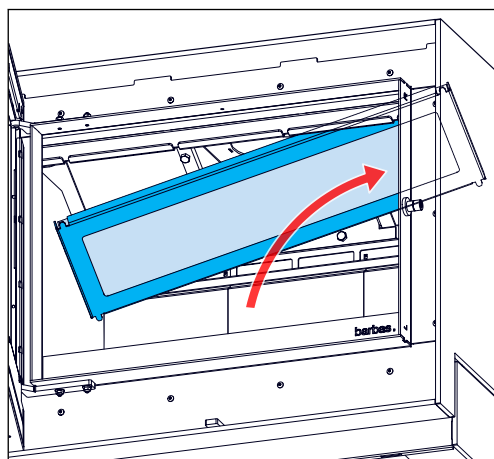

3. Move the left side of the baffle up until it is horizontal.
4. Lower the baffle on the baffle holder.

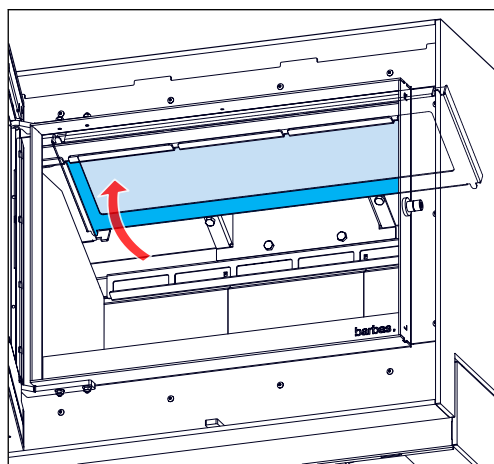

5. Push the baffle rearward until the 2 cams on the rear of the baffle go into the notches.
6. The cam is in the notch if the baffle cannot move to the left or the right.


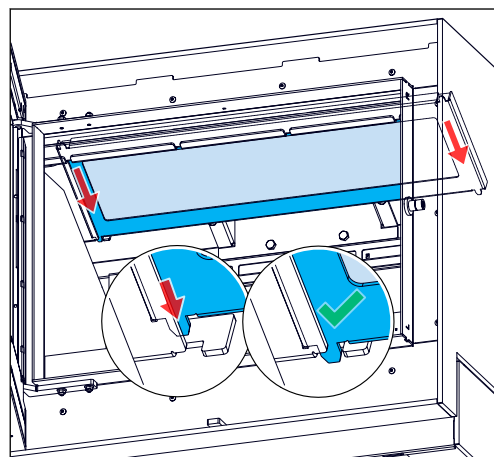


### 11.7.2

#### Install the lower baffle


Only do this procedure after finish of the procedure in section [11.7.1](#).

1. Move the lower baffle up under an angle into the combustion chamber (1) and put the right side of the baffle above the side panels (2) on the right.
2. Move the left side of the lower baffle up and put it on top of the side panels on the left. If it does not fit, make sure the side panels are firmly seated against the side wall of the appliance.
3. Put the rear side of the baffle against the rear wall (3).
4. Make sure the lower baffle is horizontal and against the rear wall.

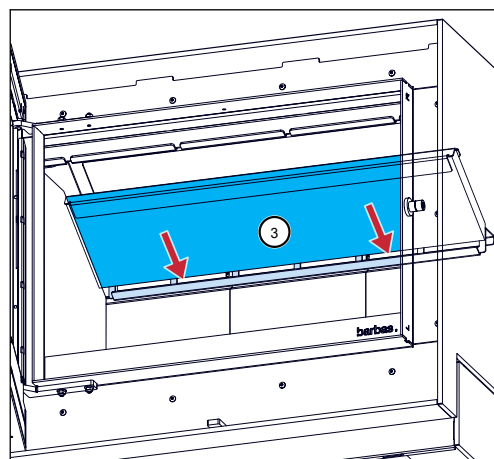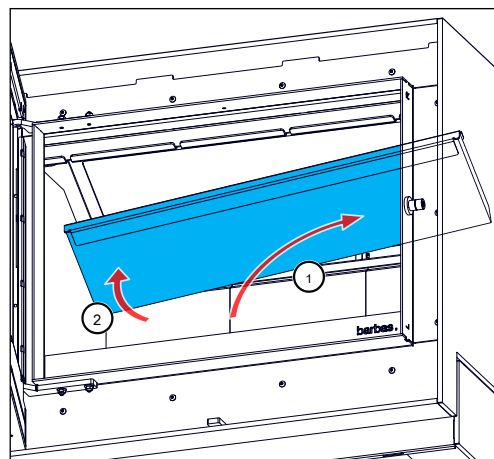



5. Make sure the upper baffle (2) is still in the correct position.
6. If the upper baffle is not in the correct position, remove the lower baffle (1) and put the upper baffle in the correct position and install the lower baffle again.

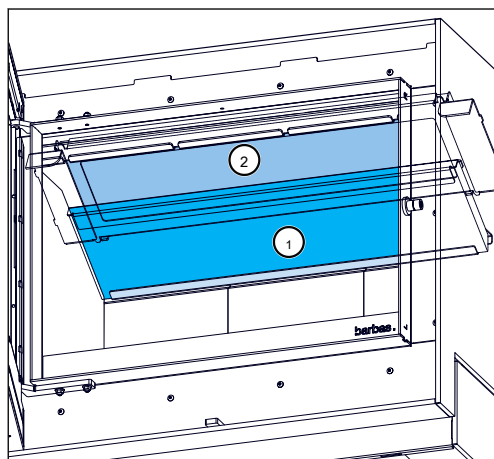


## 11.7.3


### Install the heat shield

Only do this procedure after finish of the procedure in section [11.7.2](#).

1. Move the heat shield up and put the rear side above the upper baffle (1).

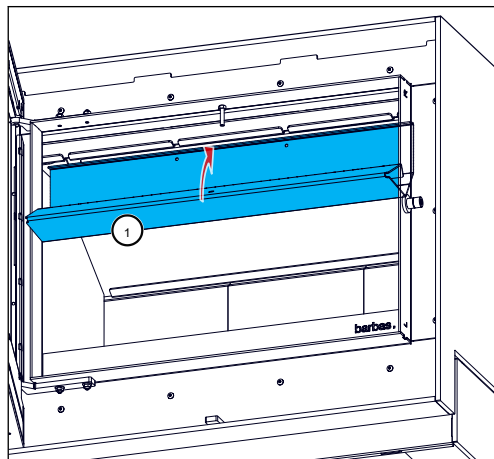

2. Move the front of the heat shield up (2) and put the edge on the metal strip under the air wash inlet (3).
3. Turn the screw down with a 3 mm hexagonal key until it is in the screw hole in the heat shield.
4. Turn the nut up with a 10 mm fork spanner and tighten it.

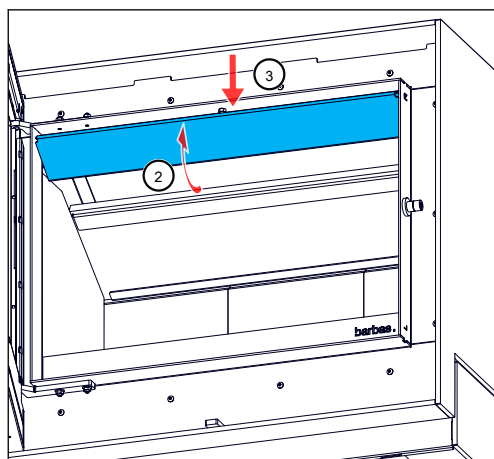

## 12 Technical data

### 12.1 Technical data

Name	Barbas		
Model	<ul style="list-style-type: none"> <li>• BOX<sup>25</sup> 55</li> <li>• BOX<sup>25</sup> 55 with wood log storage module</li> <li>• BOX<sup>25</sup> 55 with support frame</li> </ul>		
EPREL registration number	1938280		
Tested in accordance with	EN 13240:2001-A2:2004 EN16510-1 annex D, E, F BS 3841-2:1994		
Energy efficiency index	100		
Energy efficiency class	A		
Fuel	Wood logs, Wood briquettes		
Nominal fuel load	2.2 kg		
Nominal heat output (net)	8.8 kW		
Minimum heat output (net)	4.9 kW		
Useful efficiency at nominal heat output	> 75 %		
Useful efficiency at minimum heat output (indicative)	> 80%		
Seasonal efficiency	66 %		
Indirect heating function	No		
Room sealed	Yes *)		
Leak rate at 10 Pa	< 2.0 m <sup>3</sup> /h (at at 273 K, 1013 hPa)		
<b>Emissions (at 13 % O<sub>2</sub>, 273 K, 1013 hPa)</b>			
• carbon monoxide (CO)	< 0.12 vol% ( 1500 mg/Nm <sup>3</sup> )		
• particles (PM)	< 40 mg/Nm <sup>3</sup>		
• organic gaseous compounds (OGC)	< 120 mg/Nm <sup>3</sup>		
• nitrogen oxides (NO <sub>x</sub> )	< 200 mg/Nm <sup>3</sup>		
Flue gas mass flow	9.0 g/s		
Flue gas temperature	295 °C		
Chimney draught	12 Pa (0,12 mbar)		
Flue gas connection	Outer diameter 148 mm, suitable for a pipe with an inner diameter of 150 mm		
External combustion air connection	125 mm		
<b>Weight</b>	Vermiculite interior	Ceramic interior	Cast iron interior
<ul style="list-style-type: none"> <li>• BOX<sup>25</sup> 55</li> <li>• BOX<sup>25</sup> 55 with wood log storage module</li> <li>• BOX<sup>25</sup>55 with support frame</li> </ul>	<ul style="list-style-type: none"> <li>• 168 kg</li> <li>• 195 kg</li> <li>• 181 kg</li> </ul>	<ul style="list-style-type: none"> <li>• 176 kg</li> <li>• 203 kg</li> <li>• 189 kg</li> </ul>	<ul style="list-style-type: none"> <li>• 202 kg</li> <li>• 229 kg</li> <li>• 215 kg</li> </ul>

<b>Minimum distance to flammable materials</b>	
<ul style="list-style-type: none"> <li>• side wall</li> <li>• back wall</li> <li>• floor</li> <li>• ceiling</li> </ul>	Refer to section <a href="#">5</a>
<b>Used materials</b>	
<ul style="list-style-type: none"> <li>• Combustion chamber back and side panels</li> </ul>	Vermiculite 750 kg/m <sup>3</sup> / Heat resistant ceramic 1600 kg/m <sup>3</sup> / cast iron **)
<ul style="list-style-type: none"> <li>• Combustion chamber insulation</li> </ul>	Vermiculite 750 kg/m <sup>3</sup> ***)
<ul style="list-style-type: none"> <li>• Combustion floor and grate</li> </ul>	Steel
<ul style="list-style-type: none"> <li>• Lower baffle</li> </ul>	Heat resistant ceramic 2000 kg/m <sup>3</sup> / Vermiculite 750 kg/m <sup>3</sup> **)
<ul style="list-style-type: none"> <li>• Upper baffle</li> </ul>	Vermiculite 750 kg/m <sup>3</sup>
<ul style="list-style-type: none"> <li>• Front glass</li> </ul>	<ul style="list-style-type: none"> <li>• Heat resistant ceramic glass</li> </ul>
The specific precautions that shall be taken when the local space heater is assembled, installed or maintained, are listed in the attached documents:	<ul style="list-style-type: none"> <li>• Installation and maintenance manual</li> <li>• User manual</li> </ul>

\*) Only room sealed if attached to an external combustion air supply line.

\*\*) The panels are made of these materials, dependent on the choice made at the time of purchase.

\*\*\*) Only in combination with cast iron panels


## 12.2 Product information according regulation (EU) 2015/1185

Model identifier	BOX25 55										
Equivalent models	BOX25 55 with wood log storage module; BOX25 55 with support frame										
Indirect heating function	No										
Direct heat output	8.8 kW										
Indirect heat output	- kW										
Fuel	Preferred fuel (only one)	Other suitable fuel(s)	Emissions at nominal heat output (*) [mg/Nm <sup>3</sup> (13 % O <sub>2</sub> )]				Emissions at minimum heat output (*)(**) [mg/Nm <sup>3</sup> (13 % O <sub>2</sub> )]				
			PM	OGC	CO	NO <sub>x</sub>	PM	OGC	CO	NO <sub>x</sub>	
Wood logs, moisture content < 25 %	yes	no	≤ 40	≤ 120	≤ 1500	≤ 200	N.A.	N.A.	N.A.	N.A.	
Compressed wood, moisture content < 12 %	no	no									
Other woody biomass	no	no									
Non-woody biomass	no	no									
Anthracite and dry steam coal	no	no									
Hard coke	no	no									
Low temperature coke	no	no									
Bituminous coal	no	no									
Lignite briquettes	no	no									
Peat briquettes	no	no									
Blended fossil fuel briquettes	no	no									
Other fossil fuel	no	no									
Blended biomass and fossil fuel briquettes	no	no									
Other blend of biomass and solid fuel	no	no									
Characteristics when operating with the preferred fuel											
Seasonal space heating efficiency $\eta_s$ [%]	66										
Energy efficiency index (EEI)	100										
Item	Symbol	Value	Unit	Item				Symbol	Value	Unit	
Heat output				Useful efficiency (NCV as received)							
Nominal heat output	P <sub>nom</sub>	8.8	kW	Useful efficiency at nominal heat output				$\eta_{th, nom}$	76.0	%	
Minimum heat output (indicative)	P <sub>min</sub>	N.A.	kW	Useful efficiency at minimum heat output (indicative)				$\eta_{th, min}$	N.A.	%	
Auxiliary power consumption			Type of heat output/room temperature control (select one)								
At nominal heat output	e <sub>l, max</sub>	0.069	kW	Single-stage heat output, no room temperature control							yes
At minimum heat output	e <sub>l, min</sub>	N.A.	kW	Two or more manual stages, no room temperature control							no
In standby mode	e <sub>l, s</sub>	N.A.	kW	With mechanic thermostat room temperature control							no
Permanent pilot flame power requirement			With electronic room temperature control							no	
Pilot flame power requirement (if applicable)	P <sub>pilot</sub>	N.A.	kW	With electronic room temperature control plus day timer							no
				With electronic room temperature control plus week timer							no
			Other control options (multiple selection possible)								
			Room temperature control, with presence detection							no	
			Room temperature control, with open window detection							no	
			With distance control option							no	
Contact details	Barbas Belfjires BV Hallenstraat 17 5531 AB BLADEL The Netherlands						www.barbas.com				
(*) PM = particulate matter, OGC = organic gaseous compounds, CO = carbon monoxide, NO <sub>x</sub> = nitrogen oxides											
(**) Only required if correction factors F(2) or F(3) are applied.											

## 13 Dimensions


### 13.1 Dimensions BOX<sup>25</sup> 55

\*) Combustion air inlet openings (Ø 125 mm) at the rear side and bottom of the appliance.

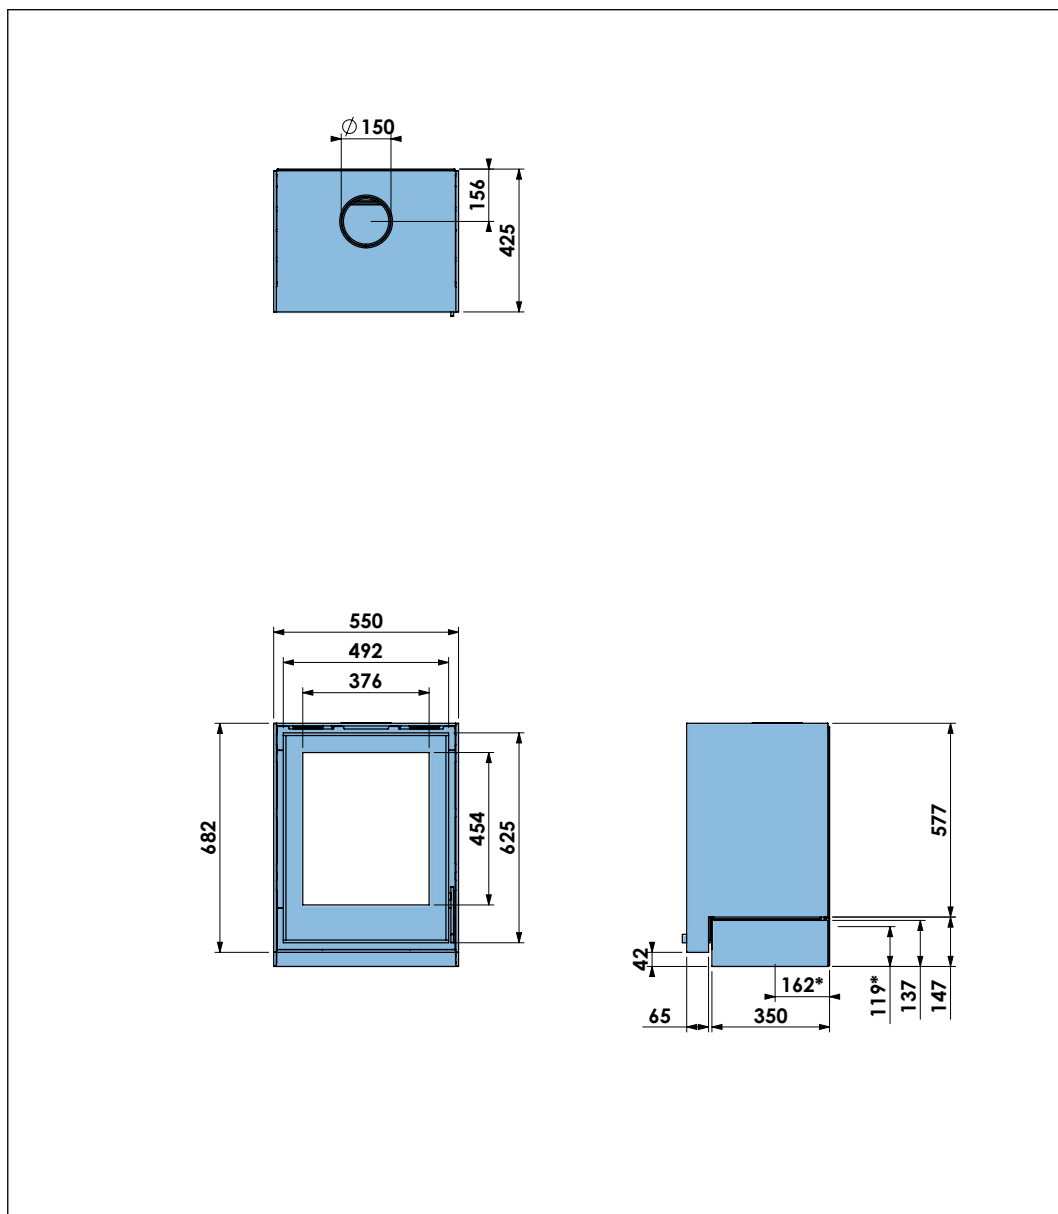


## 13.2 Dimensions BOX<sup>25</sup> 55 with wood log storage module

\*) Combustion air inlet openings (Ø 125 mm) at the rear side and bottom of the appliance.

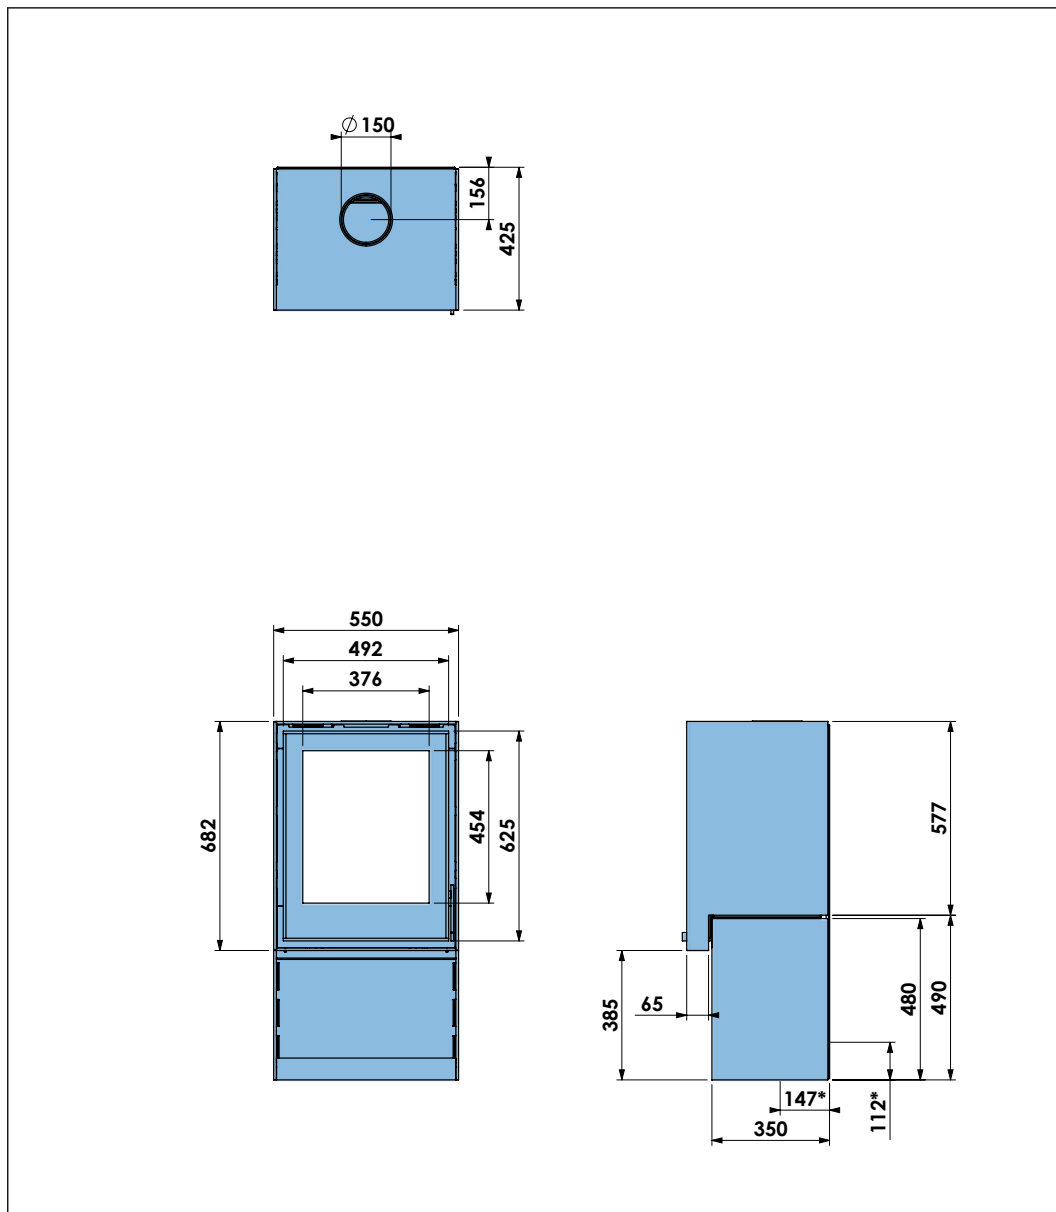


## 13.3 Dimensions BOX<sup>25</sup> 55 with support frame

\*) Combustion air inlet openings (Ø 125 mm) at the rear side and bottom of the appliance.

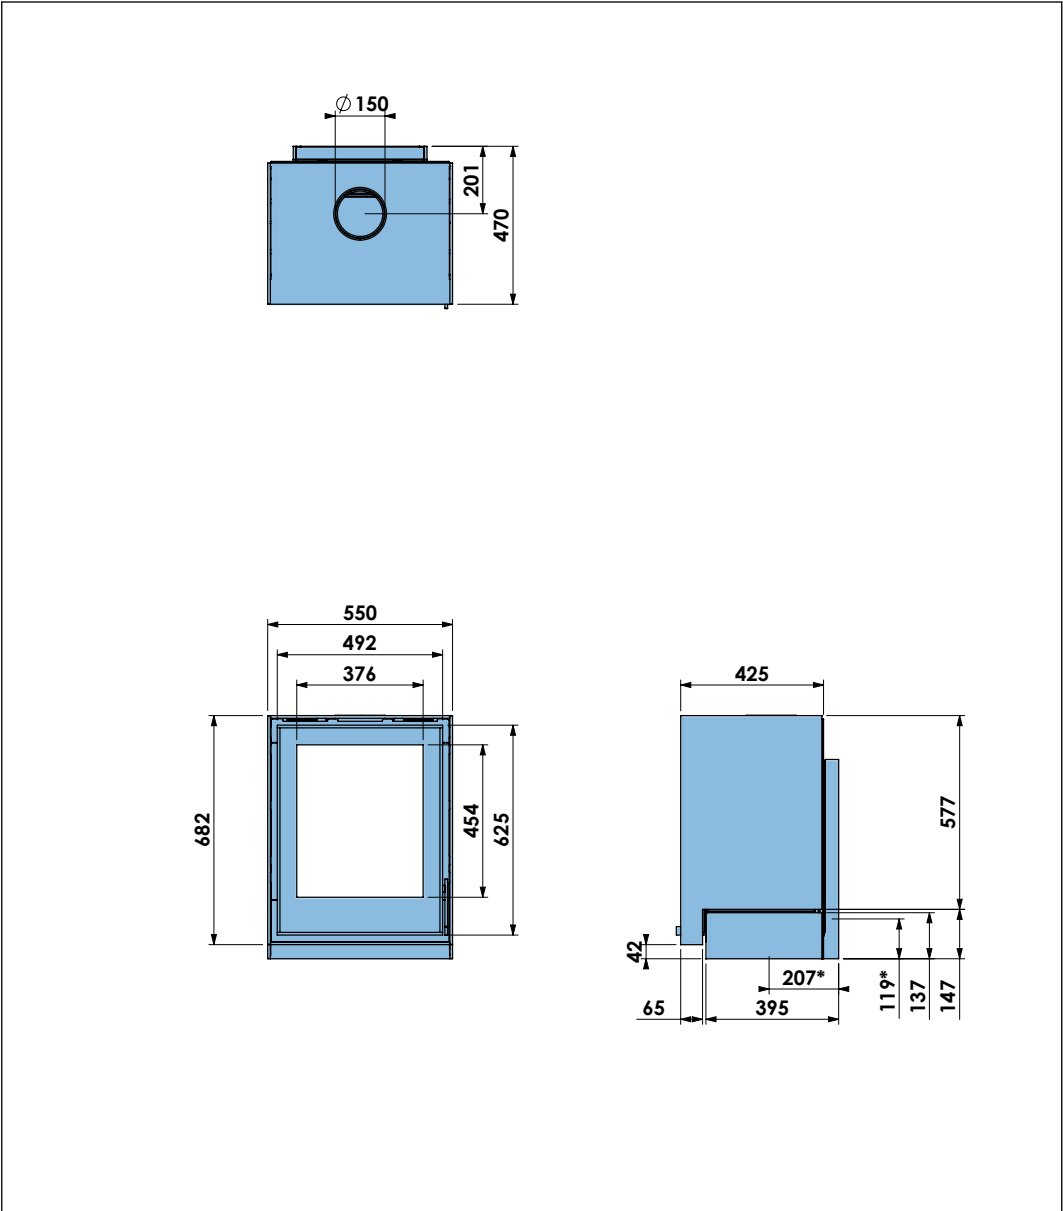

13.4      Dimensions decorative stone bar

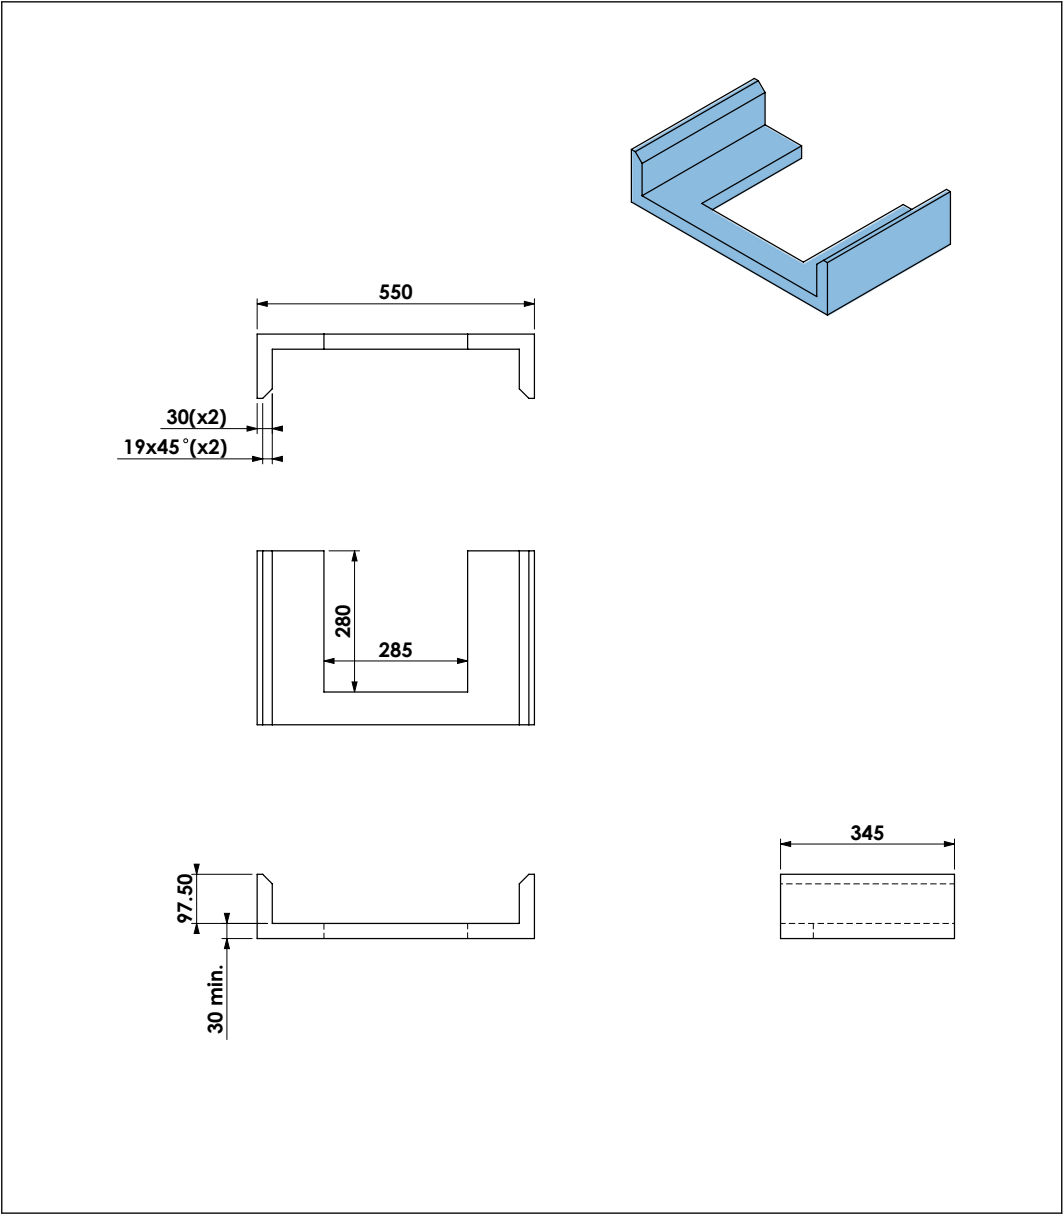



## 14 Warranty Terms

To make a claim under the warranty, it is important to register the Barbas appliance after purchase via [www.barbasbellfires.com](http://www.barbasbellfires.com).

### **Barbas Bellfires Warranty Terms**

Barbas Bellfires B.V. guarantees the quality of the supplied Barbas appliance and the quality of the materials used. All Barbas appliances are developed and manufactured according to the highest possible quality standards. If, despite all this, something should prove amiss with the Barbas appliance you have purchased, Barbas Bellfires B.V. offers the following manufacturer's warranty.

#### **Article 1: Warranty**

1. If Barbas Bellfires B.V. determines that the Barbas appliance you have purchased is defective as a result of a flaw in the construction or material, Barbas Bellfires B.V. guarantees to repair or replace the appliance free of charge, without charging any costs for labor or spare parts.
2. Repair or replacement of the Barbas appliance will be undertaken by Barbas Bellfires B.V. or by a Barbas dealer as designated by Barbas Bellfires B.V.
3. This warranty is supplementary to the existing legal national warranty of Barbas dealers and Barbas Bellfires B.V. in the country of purchase and is not intended to restrict your rights and claims based on the applicable legal provisions.

#### **Article 2: Warranty conditions**

1. Should you wish to claim under the warranty, please contact your Barbas dealer.
2. Complaints should be reported as quickly as possible after they have manifested themselves.
3. Complaints will only be accepted if they are reported to the Barbas dealer, together with the serial number of the Barbas appliance which is stated on the enclosed documents.
4. In addition, the original receipt (invoice, receipt, cash receipt) showing the date of purchase must also be submitted.
5. Repairs and replacements during the warranty period do not give any entitlement to an extension of the warranty period. After a repair or replacement of warranty parts, the warranty period shall be deemed to have started on the date of purchasing the Barbas appliance.
6. If a certain part is eligible for the warranty and the original part is no longer available, Barbas Bellfires B.V. shall ensure that an alternative part of at least the same quality shall be provided.

#### **Article 3: Warranty exclusions**

1. The warranty on the Barbas appliance ceases to be in effect if:
  - a. it is not installed according to the installation instructions, and to national and/or local regulations;
  - b. it has been installed, connected or repaired by a non-Barbas dealer;
  - c. it has not be used or maintained according to the instructions for use;

- d. it has been changed, neglected or roughly treated;
- e. it has been damaged as a result of external causes (outside the appliance itself), for example, lightning strike, water damage or fire;
- 2. In addition, the warranty lapses if the original purchase receipt shows any change, deletion, removal or if it is illegible.

#### **Article 4: Warranty area**

- 1. The warranty is only valid in those countries where Barbas appliances are sold through an official dealer network.

#### **Article 5: Warranty period**

- 1. This warranty will only be granted during the warranty period.
- 2. The body of the Barbas appliance is guaranteed for a period of 10 years against construction and/or material faults, starting from the moment of purchase.
- 3. For other parts of the Barbas appliance, a similar warranty applies from the moment of purchase for a period of two years.
- 4. For user parts such as glass, glass sealing cord and the interior of the combustion chamber, a similar guarantee is given until after the first burning.

#### **Article 6: Liability**

- 1. A claim granted by Barbas Bellfires B.V. under this warranty does not automatically imply that Barbas Bellfires B.V. also accepts liability for any possible damage. The liability of Barbas Bellfires B.V. never extends further than that stated in these warranty conditions. Any liability of Barbas Bellfires B.V. for consequential damage is expressly excluded.
- 2. That stated in this provision is not valid if and to the extent that it derives from a mandatory provision.
- 3. All agreements entered into by Barbas Bellfires B.V. are, unless specifically stated otherwise in writing and to the extent that they are permitted based on applicable law, subject to the FME-CWM general sales and delivery conditions for the technology industry.

Barbas Bellfires B.V.  
 Hallenstraat 175531 AB Bladel  
 The Netherlands  
 Tel: +31-497339200  
 Email: [info@Barbas.com](mailto:info@Barbas.com)

Carefully retain the enclosed documents; they show the serial number of the appliance. You will need this if you wish to claim under the warranty.



# barbas .

Your Barbas dealer